



98853

# POTENTIAL RELAY CROSS REFERENCE GUIDE

Listing 83 Original Equipment Manufacturers and  
Thousands of Replacement Part Numbers



## MARS 19001 6-pak potential type motor starting relay



### Quick reference relay selection chart for GENERAL ELECTRIC relays

- Determine the General Electric model number for the Relay to be replaced—the “FORM” and “GROUP”

		1 or 2 letters	One number plus 1 or 2 letters	
EXAMPLE:	<u>3ARR3*</u>	<u>A</u>	<u>3B</u>	<u>3</u>
	Basic Type	FORM	GROUP	Non-Positional

- Locate in the following table and Relay GROUP and select the corresponding MARS Replacement Relay from the kit.

<b>19002</b>	MARS 63 replaces Relay GROUPS 2J; 2K; 2L; 2M; 5N; 7J; 7K; 7L; 7M; 7N; 8L; 8M; 8N
<b>19003</b>	MARS 64 replaces Relay GROUPS 3A; 3B; 3AV; 3AU; 4A; 4B; 6A; 6B; 6AV; 10A; 10B; 10AU; 10AV
<b>19004</b>	MARS 65 replaces Relay GROUPS 3P; 3R; 3AP; 5P; 5R; 5S; 5T; 22S
<b>19005</b>	MARS 66 replaces Relay GROUPS 3U; 3V; 3AT; 6U; 6V; 6W
<b>19006</b>	MARS 67 replaces Relay GROUPS 3C; 3D; 3AA; 4C; 4D; 4BK; 6C; 6D; 6AA; 10C; 10D; 26A; 26B; 26C; 26D
<b>19007</b>	MARS 68 replaces Relay GROUPS 3E; 3F; 3AB; 3AC; 4E; 4F; 4G; 6E; 6F; 6G; 10H; 10AB; 10AC; 26E; 26F; 26G; 26H; 27E; 27F; 27G

### OPTIONAL MARS RELAYS

<b>19008</b>	MARS 69 replaces Relay GROUPS 3S; 3T; 10S; 10T; 25S; 25T; 10AS
<b>19009</b>	MARS 70 replaces Relay GROUPS 5B; 5C; 5D; 5AA; 8B; 8C; 8D
<b>19010</b>	MARS 71 replaces Relay GROUPS 6TV; 6TW; 10V

- Install relay in accordance with instructions in MARS Replacement Kit.

NOTE: These instructions also apply to TYPE 3ARR1.

Fast, on-the-spot replacement. Carefully engineered MARS relays developed from the original equipment relay specifications and the compressor motor curves.

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>ADDISON PRODUCTS</b>			<b>AMANA (cont'd)</b>			<b>BARNES MFG.CO.</b>		
8201-125	65	19004	B41917-1	68	19007	15529	63	19002
8201-127	69	**19008	B47174-1	66	19005	16933	63	19002
8201-128	69	**19008	B47176-1	66	19005	16934	67	19006
8201-20	64	19003	B51109-1	65	19004	16936	67	19006
8201-27	69	**19008	B51109-2	66	19005	16937	64	19003
8201-33	67	19006	B51109-3	69	**19008	16938	67	19006
8201-34	67	19006				16939	64	19003
8201-39	64	19003	<b>AMERICAN FLOOR MACHINE</b>			<b>BENDIX-WESTINGHOUSE</b>		
8201-40	67	19006	2-14-0155	63	19002	1456-315	63	19002
8201-44	69	**19008	2-14-0169	63	19002	1456-319	64	19003
8201-48	64	19003	2-14-0170	63	19002	1456-370	63	19002
8201-49	64	19003	2-14-02820	63	19002	1456-371	63	19002
8201-52	66	19005	2-14-1245	63	19002	1456-372	67	19006
8201-53	66	19005	2-14-1929	63	19002	1456-373	63	19002
8201-54	66	19005	<b>AMERICAN MOTORS CORP.</b>			1456-374	63	19002
8201-55	67	19006	1084296	65	19004	1456-376	63	19002
8201-62	66	19005	1084298	67	19006	1456-377	64	19003
8201-7	68	19007	1084380	64	19003	1456-382	64	19003
8201-78	64	19003	1084528	69	**19008	1456-396	67	19006
8201-95	64	19003	1084529	66	19005	1456-436	68	19007
			1195257	67	19006	1456-463	67	19006
			1195258	64	19003	1456-484	67	19006
<b>ADMIRAL CORP.</b>			<b>AMERICAN STANDARD</b>			1456-521	65	19004
100FC7	67	19006	050-S-3780	67	19006	1456-559	68	19007
100F7	67	19006	304-13599-00	69	**19008	1456-563	67	19006
100F7S	67	19006	304-13599-01	66	19005	1456-565	67	19006
11872	69	**19008	304-13599-02	66	19005	1456-566	67	19006
11873	65	19004	304-13599-03	65	19004	1456-568	63	19002
11873-1	65	19004	304-13599-04	66	19005	1456-569	67	19006
19037-12	65	19004	304-13599-05	69	**19008	1456-571	65	19004
1955	67	19006	304-13599-06	69	**19008	1456-574	67	19006
75FC5	65	19004	304-8033	67	19006	1456-585	65	19004
7673	67	19006	304-8621	71	**19010	1456-586	63	19002
			304-9037	69	**19008	1456-587	67	19006
<b>AMANA</b>			304-9820-00	64	19003	1456-596	68	19007
A40033-1	67	19006	304-9820-01	65	19004	1456-600	67	19006
A40231-1	65	19004	325-S-1199	67	19006	1456-603	65	19004
A40232-1	68	19007	325-S-3567	67	19006	1456-606	64	19003
A40235-1	67	19006	325-S-3698	64	19003	1456-608	67	19006
A40260-1	67	19006	325-S-3699	66	19005	1456-620	64	19003
A40293-1	64	19003	325-S-3801	64	19003	1456-622	67	19006
A4033-1	65	19004	325-S-3928	66	19005	1456-635	63	19002
A40333-1	65	19004	325-S-4344	64	19003	1456-636	64	19003
A40338-1	67	19006	325-S-6303	65	19004	1456-637	63	19002
A40438-1	67	19006	275-B-16	65	19004	1456-638	67	19006
A40538-1	69	**19008	275-00	64	19003	1456-645	70	**19009
A40542	64	19003	275-01	64	19003	1456-646	63	19002
A40543	67	19006	275-02	64	19003	1456-647	63	19002
A40858	64	19003	275-04	64	19003	1456-648	64	19003
A40858-1	64	19003	275-05	64	19003	1456-673	67	19006
A45042-1	66	19005	275-06	67	19006	1456-675	66	19005
A45264-1	66	19005	275-07	66	19005	1456-676	67	19006
A45368-1	69	**19008	275-09	66	19005	1456-679	63	19002
A45551-1	64	19003	275-13	65	19004	1456-680	67	19006
B41328-1	69	**19008	275-14	66	19005	1456-690	67	19006
B41329-1	69	**19008						
B41511-1	65	19004						

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>BENDIX-WESTINGHOUSE (cont'd)</b>			<b>BRISTOL</b>			<b>BRYANT</b>		
1456-692	63	19002	650058		16028	29224-B2	67	19006
1456-693	64	19003	650097		16058	32314-B5	67	19006
1456-694	67	19006	650143		16030	50013-D	67	19006
1456-720	64	19003	650153		16032	501639-D7	71	**19010
1456-730	64	19003	650155		16059	50187-D	64	19003
1456-735	69	**19008	650160		16060	50188-D	64	19003
1456-752	64	19003	650169		16061	50535-D	67	19006
1456-753	64	19003	650304		16029	51430-C	67	19006
1456-759	63	19002	650409		16047	52160-D	64	19003
1456-772	64	19003	650410		16062	52161-D	67	19006
1456-773	65	19004	650512		16048	52162-D	68	19007
1456-774	64	19003	650567		16049	52163-D	64	19003
1456-775	64	19003	650568		16063	52172-D	67	19006
1456-776	67	19006	650569		16050	52744-D	67	19006
1456-777	63	19002	650570		16064	52745-D	64	19003
1456-778	64	19003	650571		16065	53039-D	67	19006
1456-779	63	19002	650855		16051	53040-D	68	19007
1456-780	65	19004	650879		16066	53112-D	68	19007
1456-781	64	19003	650887		16067	54434-D	67	19006
1456-782	67	19006	650889		16068	54823-D	64	19003
1456-783	64	19003	650919		16069	56271-D	64	19003
1456-784	67	19006	650926		16070	56570-D	67	19006
1456-785	64	19003	650929		16080	56571-D	67	19006
1456-786	68	19007	650942		16072	56572-D	67	19006
1456-787	67	19006	650943		16073	56573-D	68	19007
1456-790	69	**19008	650944		16074	56575-D	67	19006
1456-794	65	19004	650945		16075	57405-D	64	19003
1456-802	67	19006	650946		16076	57901-D	69	**19008
1456-803	69	**19008	650947		16077	58340-D1	64	19003
1456-804	64	19003	650948		16078	58340-D2	66	19005
1456-805	64	19003	650949		16052	58340-D3	66	19005
1456-806	67	19006	650950		16079	58340-D5	71	**19010
1456-807	64	19003	650959		16080	58340-D6	69	**19008
1456-825	65	19004	650962		16081	58340-D8	65	19004
1456-845	64	19003	650965		16082	59591-D1	64	19003
1456-876	69	**19008	650971		16083	59591-D2	66	19005
1456-887	65	19004	650972		16084			
1456-896	64	19003	650975		16054	<b>CARRIER AIR CONDIT.</b>		
1456-899	69	**19008	650976		16055	HN61HB496	71	**19010
1456-902	65	19004	650977		16053	HN61HB497	63	19002
1456-903	66	19005	650978		16056	HN61HB498	65	19004
1456-904	66	19005	650979		16057	HN61HB499	66	19005
1456-905	66	19005	650988		16057	HN61HB504	65	19004
1456-909	64	19003			16092	HN61HB510	69	**19008
1456-916	67	19006	<b>BRUNNER (DUNHAM-BUSH)</b>			HN61HN046	68	19007
1456-917	65	19004	GB1261T-1	63	19002	HN61HZ025	65	19004
1456-920	66	19005	GB1261T-2	67	19006	HN61HZ027	68	19007
1456-932	66	19005	GB1261T-3	67	19006	HN61HZ029	64	19003
1456-964	63	19002	GB1261T-4	68	19007	HN61HZ036	67	19006
			GB1331T-1	63	19002	HN61HZ037	67	19006
			GB1331T-3	67	19006	HN61HZ039	64	19003
			GB1331T-4	68	19007	HN61HZ041	68	19007
<b>BIRTMAN ELECTRIC</b>			GB1911T-1	63	19002	HN61HZ042	64	19003
110441	65	19004	GB1911T-3	67	19006	HN61HZ043	65	19004
110459	64	19003				HN61HZ044	68	19007
157579	67	19006				HN61HZ045	65	19004
157776	69	**19008						

\*\* Optional Mars Relay (not in 6-Pak)

Available through your local wholesaler **3**

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>CARRIER AIR CONDIT. (cont'd)</b>			<b>CARRIER AIR CONDIT. (cont'd)</b>			<b>CHRYSLER-AIR TEMP (cont'd)</b>		
HN61HZ046	68	19007	HN61ZB-190	65	19004	2014155	67	19006
HN61HZ047	67	19006	HN61ZB-191	67	19006	2015519	65	19004
HN61HZ048	63	19002	HN61ZS-038	67	19006	2015523	64	19003
HN61HZ050	65	19004	HN61ZS-345	67	19006	2023494	67	19006
HN61HZ051	65	19004	HN61ZS-3455	67	19006	2025533	65	19004
HN61HZ052	66	19005	HN61ZS-347	67	19006	2540175	65	19004
HN61HZ054	67	19006	38GK57901D1	65	19004	3408576	69	**19008
HN61HZ055	64	19003				3408587	65	19004
HN61HZ056	64	19003	<b>CARRIER CORP.</b>			<b>COBELL IND.</b>		
HN61HZ057	69	**19008	HN61HA064	67	19006	5600326	65	19004
HN61HZ059	65	19004	HN61HB046	64	19003	5600327	66	19005
HN61HZ060	66	19005	HN61HB047	67	19006	<b>COLEMAN</b>		
HN61HZ061	64	19003	HN61HB055	67	19006	4050A323	67	19006
HN61HZ062	64	19003	HN61HB061	64	19003	6006-175	68	19007
HN61KA-040	65	19004	HN61HB500	71	**19010	6007-174	67	19006
HN61KA-050	64	19003	HN61HB500-A	71	**19010	6102-214	65	19004
HN61KA-055	67	19006	HN61HB501-A	71	**19010	6103-171	64	19003
HN61KA-064	67	19006	HN61HS100	64	19003	6103-316	66	19005
HN61KA04D	65	19004	<b>CENTURY ELECTRIC</b>			6104-315	64	19003
HN61KA054	65	19004	A124P1	64	19003	6152-171	65	19004
HN61KA062	64	19003	A124P2	63	19002	6163-315	66	19005
HN61KB-038	67	19006	W15358	63	19002	6184-165	66	19005
HN61KB-039	64	19003	W15359	64	19003	6186-182	66	19005
HN61KB-045	67	19006	W1620	63	19002	6208-365	66	19005
HN61KB-046	64	19003	W1623	64	19003	6211-165	67	19006
HN61KB-047	67	19006	W1624	64	19003	6212-165	67	19006
HN61KB-049	65	19004	1424130	65	19004	6216-174	64	19003
HN61KB-050	65	19004	1424520	64	19003	66219-122	67	19006
HN61KB-054	64	19003	1428164	67	19006	6220-213	67	19006
HN61KB-055	64	19003	1428464	64	19003	6220-298	69	**19008
HN61KB-056	64	19003	1742933	66	19005	6221-160	67	19006
HN61KB-057	67	19006	1742946	69	**19008	6222-160	66	19005
HN61KB-060	64	19003	1743121	69	**19008	6223-122	64	19003
HN61KB-061	64	19003	1743725	67	19006	6247-307	65	19004
HN61KB-062	69	**19008	1746896	65	19004	6248-307	65	19004
HN61KB-063	64	19003	1747032	66	19005	6258-307	65	19004
HN61KB-066	64	19003	1748767	67	19006	6303-315	69	**19008
HN61KB-068	64	19003	1980188	64	19003	6922-315	65	19004
HN61KB-070	65	19004	<b>CHRYSLER-AIR TEMP</b>			6930-315	65	19004
HN61KB020	67	19006	1985478	67	19006	6930-316	65	19004
HN61KB021	66	19005	1986873	64	19003	6942-315	66	19005
HN61KB022	64	19003	1986874	64	19003	<b>COLT INDUSTRIES</b>		
HN61KB023	65	19004	1987284	68	19007	017-02-279	67	19006
HN61KB024	64	19003	1993277	64	19003	017-02-280	63	19002
HN61KB027	64	19003	1993292	64	19003	017-02-281	63	19002
HN61KB036	65	19004	2001368	64	19003	017-02-282	67	19006
HN61KB048	68	19007	2001607	67	19006	<b>COOLERATOR</b>		
HN61KB075	66	19005	2003501	65	19004	A104312	69	**19008
HN61KB109	69	**19008	2003664	65	19004	A104371	69	**19008
HN61ZB-010	65	19004	2004636	67	19006	A104451	69	**19008
HN61ZB-011	68	19007	2005451	68	19007	A104912	69	**19008
HN61ZB-020	67	19006	2005519	65	19004	A106524	69	**19008
HN61ZB-021	68	19007	2009413	66	19005	A108445	67	19006
HN61ZB-030	65	19004	2009886	69	**19008			
HN61ZB-031	67	19006						

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>COPELAND</b>			<b>COPELAND (cont'd)</b>			<b>COPELAND (cont'd)</b>		
BUS9540	68	19007	040-0001-17		16095	040-0003-01	68	19007
KG640	64	19003		64	19003	040-0003-02	63	19002
KK549	70	**19009	040-0001-18	67	19006	040-0003-03	70	**19009
KK640*	65	19004	040-0001-19		16089	040-0003-04	65	19004
KK641*	65	19004		66	19005	040-0003-05	67	19006
KK645*	63	19002	040-0001-20		16023	040-0003-06	64	19003
KK646*	70	**19009		69	**19008	040-0003-07	67	19006
KK649	65	19004	040-0001-22	63	19002	040-0003-08	65	19004
KK649-1	65	19004	040-0001-23	63	19002	040-0003-13	70	**19009
KL641	67	19006	040-0001-25		16035	040-0003-14	64	19003
KL642*	67	19006	040-0001-26		16022	040-0003-15	68	19007
KL643	70	**19009		65	19004	040-0003-16	64	19003
KM543	63	19002	040-0001-27	63	19002	040-0003-19	68	19007
KRV540*	65	19004	040-0001-28	64	19003	040-0003-23	65	19004
KSL640*	68	19007	040-0001-30		16097	040-0003-24	67	19006
KSL641*	67	19006		70	**19009	040-0003-25	68	19007
MRV540-1	65	19004	040-0001-31		16094	040-0003-26	64	19003
NR40-540	64	19003		68	19007	040-0003-27	65	19004
NR46-540*	68	19007	040-0001-32	63	19002	040-0003-28	67	19006
UD5540	65	19004	040-0001-34		16099	040-0004-05	67	19006
UG7574	68	19007		71	**19010	040-0005-00	67	19006
UG7580	65	19004	040-0001-35		16090	040-0006-00	67	19006
UG7581*	67	19006		66	19005	040-0006-01	64	19003
UG7582	65	19004	040-0001-36		16096	040-0006-02	65	19004
UG8540	64	19003		69	**19008	040-0006-03	65	19004
UH9540	64	19003	040-0001-37	65	19004	040-0006-04	67	19006
UH9541-1	65	19004	040-0001-38	69	**19008	040-0006-05	64	19003
UJ8540*	67	19006	040-0001-41	63	19002	040-0006-06	66	19005
UJ8541*	65	19004	040-0001-48		16093	040-0006-07	69	**19008
UJ8580	67	19006	040-0001-49		16087	040-0007-00	63	19002
US11-540	68	19007	040-0001-50		16085	040-0007-01	70	**19009
US11-541	67	19006	040-0001-51		16021	040-0007-02		16110
US11-542	67	19006	040-0001-52		16094		70	**19009
US8540	67	19006	040-0001-53		16095	040-0007-03	63	19002
US9540*	68	19007	040-0001-54		16089	040-0007-04		16111
UW10-540	66	19005	040-0001-55		16023		67	19006
YF75-40*	65	19004	040-0001-56		16096	040-0007-06	65	19004
YF7543	65	19004	040-0001-57		16097	040-0008-00	68	19007
040-0001-01	63	19002	040-0001-59		16090	040-0008-01	67	19006
040-0001-02	65	19004	040-0001-60		16091	040-0008-02	63	19002
040-0001-03		16087	040-0001-61		16086	040-0008-03	70	**19009
	68	19007	040-0001-62		16035	040-0008-06	65	19004
040-0001-04		16085	040-0001-63		16112	040-0008-09	68	19007
040-0001-05	64	19003	040-0001-64		16098	040-0008-11	64	19003
040-0001-08		16088	040-0001-66		16103	040-0011-00	68	19007
	67	19006	040-0001-67		16120	040-0011-01	65	19004
040-0001-09		16103	040-0001-73		16136	040-0011-02	67	19006
	67	19006	040-0001-75		16135	040-0011-03	65	19004
040-0001-10	67	19006	040-0001-83		16137	040-0012-00	65	19004
040-0001-11	65	19004	040-0001-84		16138	040-0012-02	69	**19008
040-0001-12		16098	040-0001-85		16139	040-0013-00	64	19003
	64	19003	040-0001-86		16140	040-0014-00	67	19006
040-0001-14	64	19003	040-0001-87		16141	040-0014-01	65	19004
040-0001-15	64	19003	040-0002-01	68	19007	040-0014-02	67	19006
040-0001-16	67	19006	040-0002-03	64	19003	040-0014-03	65	19004

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>COPELAND (cont'd)</b>			<b>DELCO (cont'd)</b>			<b>FEDDERS ALSO SEE NORGE (cont'd)</b>		
040-0014-04	66	19005	4923572	64	19003	16-4-013B-9	64	19003
040-0014-05	67	19006	4923625	67	19006	16-4-015B-1	66	19005
040-0014-06	67	19006	4925245	64	19003	16-4-015B-2	64	19003
040-0014-08	65	19004	4926551	66	19005	16-4-015B-3	64	19003
040-0014-09	69	**19008	4927667	64	19003	16-4-015B-4	66	19005
040-0014-11	64	19003	4927686	66	19005	16-4-015B-5	64	19003
040-0015-00	67	19006	4928736	67	19006	16-4-015B-6	64	19003
040-0016-00	67	19006	4930395	64	19003	16-4-015B-7	65	19004
040-0044-00	67	19006	4932002	67	19006	16-4-029B-1	65	19004
040-0044-01	64	19003	4934284	66	19005	16-4-029B-10	68	19007
040-0046-00	68	19007	4936360	66	19005	16-4-029B-11	65	19004
040-0046-01	67	19006				16-4-029B-12	69	**19008
040-0046-02	67	19006	<b>EMERSON</b>			16-4-029B-13	69	**19008
040-0046-03	65	19004	E10811	67	19006	16-4-029B-14	69	**19008
040-0046-05	67	19006	E10822	67	19006	16-4-029B-2	66	19005
040-0046-07	64	19003	E10824	69	**19008	16-4-029B-3	69	**19008
040-0046-08	65	19004	E10825	66	19005	16-4-029B-4	64	19003
040-0104-00	63	19002	E10831	67	19006	16-4-029B-5	67	19006
4US16-540	64	19003	E10832	65	19004	16-4-029B-6	64	19003
4US26-540	67	19006	E10833	67	19006	16-4-029B-7	66	19005
56542	63	19002	E10834	64	19003	16-4-029B-8	67	19006
75539*	64	19003	E10835	69	**19008	16-4-029B-9	65	19004
76541*	67	19006	E10836	65	19004			
76543-5	68	19007	E11081	65	19004			
76577*	70	**19009				<b>FRANKLIN ELECTRIC</b>		
76580*	70	**19009	<b>FEDDERS ALSO SEE NORGE</b>			B150517-2	64	19003
76641	67	19006	16-4-010B	68	19007	B150517-3	67	19006
96540*	68	19007	16-4-010B-1	65	19004	155031-101		19550
			16-4-010B-2	67	19006	155031-102		19551
<b>CRANE CO.</b>			16-4-010B-3	67	19006	155031-103		19551
823-060	66	19005	16-4-010B-4	68	19007	155031-104		19550
823-062	64	19003	16-4-010B-5	64	19003	155031-105		19550
823-064	64	19003	16-4-010B-6	69	**19008			
823-066	64	19003	16-4-010B-7	66	19005	<b>FRIEDRICH REFRIG. INC</b>		
			16-4-010B-8	69	**19008	1281180	67	19006
			16-4-012B-1	64	19003	1281220	67	19006
<b>DAY AND NIGHT</b>			16-4-012B-2	64	19003	1281221	66	19005
DNP-02-0168	64	19003	16-4-012B-3	66	19005	1281222	66	19005
DNP-02-0169	64	19003	16-4-012B-4	66	19005	1281223	67	19006
DNP-02-0172	67	19006	16-4-012B-5	64	19003	1281224	64	19003
DNP-02-0370	68	19007	16-4-012B-6	66	19005	1281225	64	19003
DNP-02-0374	65	19004	16-4-012B-7	66	19005	1281226	67	19006
DNP-02-0376	66	19005	16-4-012B-8	65	19005	1281227	65	19004
DNP-02-0377	66	19005	16-4-013B-1	65	19004	1281230	67	19006
DNP-02-0378	64	19003	16-4-013B-10	64	19003	1281231	69	**19008
DNP-02-0428A	66	19005	16-4-013B-11	68	19007	1281232	65	19004
DNP-02-0430C	67	19006	16-4-013B-12	69	**19008	1281233	64	19003
DNP-02-0552	67	19006	16-4-013B-13	67	19006	1281235	67	19006
PS1660	64	19003	16-4-013B-14	66	19005	1281236	64	19003
PS1916	64	19003	16-4-013B-2	65	19004	1281240	68	19007
51639D	67	19006	16-4-013B-3	66	19005	1281241	66	19005
			16-4-013B-4	66	19005	1281242	66	19005
<b>DELCO</b>			16-4-013B-5	69	**19008	1281243	64	19003
AX241707	64	19003	16-4-013B-6	64	19003	1281245	64	19003
BX243032	67	19006	16-4-013B-7	67	19006	1281249	65	19004
CX248374	64	19003	16-4-013B-8	67	19006	1281265	67	19006
3934284	66	19005						

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>FRIEDRICH REFRIG. INC (cont'd)</b>			<b>FRIGIDAIRE (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>		
1281420	65	19004	6571598	68	19007	3ARR3*3AA*	67	19006
1281600	68	19007	6594940	63	19002	3ARR3*3AB*	68	19007
1281630	67	19006	<b>GEMLINE</b>			3ARR3*3AC*	68	19007
1281635	67	19006	PR063	63	19002	3ARR3*3AP*	65	19004
1281644	66	19005	PR064	64	19003	3ARR3*3AT*	66	19005
1281760	67	19006	PR065	65	19004	3ARR3*3AU*	64	19003
1281770	67	19006	PR066	66	19005	3ARR3*3AV*	64	19003
1281850	68	19007	PR067	67	19006	3ARR3*3B*	64	19003
60-752-27	69	**19008	PR068	68	19007	3ARR3*3C*	67	19006
600-071-00	67	19006	PR070	70	**19009	3ARR3*3D*	67	19006
600-659-00	65	19004	PR071	71	**19010	3ARR3*3E*	68	19007
600-752-00	66	19005	<b>GENERAL ELECTRIC</b>			3ARR3*3F*	68	19007
600-752-01	67	19006	3ARR22W24R3		16057	3ARR3*3P*	65	19004
600-752-02	65	19004	3ARR22W3N3		16053	3ARR3*3R*	65	19004
600-752-03	67	19006	3ARR22W3P3		16054	3ARR3*3S*	69	**19008
600-752-04	66	19005	3ARR22W3S3		16055	3ARR3*3T*	69	**19008
600-752-05	66	19005	3ARR22W3U3		16056	3ARR3*3U*	66	19005
600-752-06	69	**19008	3ARR22W4A3		16092	3ARR3*3V*	66	19005
600-752-07	64	19003	3ARR22W6B3		16064	3ARR3*4A*	64	19003
600-752-08	67	19006	3ARR3*10A*	64	19003	3ARR3*4B*	64	19003
600-752-09	64	19003	3ARR3*10AB*	68	19007	3ARR3*4BK*	67	19006
600-752-10	67	19006	3ARR3*10AC*	68	19007	3ARR3*4C*	67	19006
600-752-12	64	19003	3ARR3*10AS*	69	**19008	3ARR3*4D*	67	19006
600-752-13	66	19005	3ARR3*10AU*	64	19003	3ARR3*4E*	68	19007
600-752-14	69	**19008	3ARR3*10AV*	64	19003	3ARR3*4F*	68	19007
600-752-16	69	**19008	3ARR3*10B*	64	19003	3ARR3*4G*	68	19007
600-752-17	66	19005	3ARR3*10C*	67	19006	3ARR3*5AA*	70	**19009
600-752-25	65	19004	3ARR3*10D*	67	19006	3ARR3*5B*	70	**19009
600-752-26	68	19007	3ARR3*10H*	68	19007	3ARR3*5C*	70	**19009
600-752-27	69	**19008	3ARR3*10S*	69	**19008	3ARR3*5D*	70	**19009
600-752-38	64	19003	3ARR3*10T*	69	**19008	3ARR3*5N*	63	19002
700-093-00	63	19002	3ARR3*10V*	71	**19010	3ARR3*5P*	65	19004
700-093-01	65	19004	3ARR3*2J*	63	19002	3ARR3*5R*	65	19004
<b>FRIGIDAIRE</b>			3ARR3*2K*	63	19002	3ARR3*5S*	65	19004
EA-213827	67	19006	3ARR3*2L*	63	19002	3ARR3*5T*	65	19004
EA184404	64	19003	3ARR3*2M*	63	19002	3ARR3*6A*	64	19003
EA184405	64	19003	3ARR3*22S*	65	19004	3ARR3*6AA*	67	19006
EA184439	64	19003	3ARR3*25S*	69	**19008	3ARR3*6AV*	64	19003
EA184440	67	19006	3ARR3*25T*	69	**19008	3ARR3*6B*	64	19003
EA184600	68	19007	3ARR3*26A*	67	19006	3ARR3*6C*	67	19006
EA184641	68	19007	3ARR3*26B*	67	19006	3ARR3*6D*	67	19006
E213827	67	19006	3ARR3*26C*	67	19006	3ARR3*6E*	68	19007
628036	67	19006	3ARR3*26D*	67	19006	3ARR3*6F*	68	19007
6540336	65	19004	3ARR3*26E*	68	19007	3ARR3*6G*	68	19007
6542551	67	19006	3ARR3*26F*	68	19007	3ARR3*6TV*	71	**19010
6543110	65	19004	3ARR3*26G*	68	19007	3ARR3*6TW*	71	**19010
6543883	64	19003	3ARR3*26H*	68	19007	3ARR3*6U*	66	19005
6543988	65	19004	3ARR3*27A*	70	**19009	3ARR3*6V*	66	19005
6544041	64	19003	3ARR3*27B*	70	**19009	3ARR3*6W*	66	19005
6571039	68	19007	3ARR3*27C*	70	**19009	3ARR3*7J*	63	19002
6571048	68	19007	3ARR3*27E*	68	19007	3ARR3*7K*	63	19002
6571246	64	19003	3ARR3*27F*	68	19007	3ARR3*7L*	63	19002
6571309	67	19006	3ARR3*27G*	68	19007	3ARR3*7M*	63	19002
			3ARR3*3A*	64	19003	3ARR3*7N*	63	19002
						3ARR3*8B*	70	**19009

\*\* Optional Mars Relay (not in 6-Pak)

Available through your local wholesaler **7**

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>GENERAL ELECTRIC (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>		
3ARR3*8C*	70	**19009	3ARR3-A4A2	64	19003	3ARR3-B3A3	64	19003
3ARR3*8D*	70	**19009	3ARR3-A4A3	64	19003	3ARR3-B3A4	64	19003
3ARR3*8L*	63	19002	3ARR3-A4D2	67	19006	3ARR3-B3B2	64	19003
3ARR3*8M*	63	19002	3ARR3-A4D3	67	19006	3ARR3-B3B3	64	19003
3ARR3*8N*	63	19002	3ARR3-A4F3	68	19007	3ARR3-B3B4		16101
3ARR3-AE7J3	63	19002	3ARR3-A4G3	68	19007		64	19003
3ARR3-AE7K3	63	19002	3ARR3-A5C2	70	**19009	3ARR3-B3B5	64	19003
3ARR3-AH10S4	69	**19008	3ARR3-A5C3	70	**19009	3ARR3-B3C1	67	19006
3ARR3-AH7M3	63	19002	3ARR3-A5D2	70	**19009	3ARR3-B3C2	67	19006
3ARR3-AH7M4	63	19002	3ARR3-A5D3	70	**19009	3ARR3-B3C3	67	19006
3ARR3-AJ3A3	64	19003	3ARR3-A5D4	70	**19009	3ARR3-B3C5	67	19006
3ARR3-AJ3R3	65	19004	3ARR3-A5P2	65	19004	3ARR3-B3C6	67	19006
3ARR3-AJ6A3	64	19003	3ARR3-A5P3	65	19004	3ARR3-B3D3	67	19006
3ARR3-AJ8N3	63	19002	3ARR3-A5R3	65	19004	3ARR3-B3D6	67	19006
3ARR3-AP5D3	70	**19009	3ARR3-A6A2	64	19003	3ARR3-B3P3		16034
3ARR3-AP7M3	63	19002	3ARR3-A6A3	64	19003		65	19004
3ARR3-AV3B3	64	19003	3ARR3-A6B3	64	19003	3ARR3-B3P6	65	19004
3ARR3-AV4A3	64	19003	3ARR3-A6D2	67	19006	3ARR3-B3R3	65	19004
3ARR3-AV6B2	64	19003	3ARR3-A6D5	67	19006	3ARR3-B3R4	65	19004
3ARR3-AW10S2	69	**19008	3ARR3-A6F2	68	19007	3ARR3-B3R5	65	19004
3ARR3-AW10S3	69	**19008	3ARR3-A6F3	68	19007	3ARR3-B3S2	69	**19008
3ARR3-AW3T2	69	**19008	3ARR3-A6F5	68	19007	3ARR3-B3S3	69	**19008
3ARR3-A10AA3	69	**19008	3ARR3-A6TV2	71	**19010	3ARR3-B3S5	69	**19008
3ARR3-A10AB3	69	**19003	3ARR3-A6U3	66	19005	3ARR3-B3T3	69	**19008
3ARR3-A10AD3	67	19006	3ARR3-A6V2	66	19005	3ARR3-B3U3	66	19005
3ARR3-A10AT3	69	**19008	3ARR3-A6V3	66	19005	3ARR3-B3U4		16027
3ARR3-A10S2	69	**19008	3ARR3-A6V5	66	19005	3ARR3-B3V3	66	19005
3ARR3-A10S3	69	**19008	3ARR3-A6W3	66	19005	3ARR3-B3V4	66	19005
3ARR3-A10T3	69	**19008	3ARR3-A7L3	63	19002	3ARR3-B4A3	64	19003
3ARR3-A10V2	66	19005	3ARR3-A7L5	63	19002	3ARR3-B4A4	64	19003
3ARR3-A2K2	63	19002	3ARR3-A7M2	63	19002	3ARR3-B4B3	64	19003
3ARR3-A2M3	63	19002	3ARR3-A7M3	63	19002	3ARR3-B4B4	64	19003
3ARR3-A2P2	63	19002	3ARR3-A7M5	63	19002	3ARR3-B4C3	67	19006
3ARR3-A2P3	63	19002	3ARR3-BL6TW4	71	**19010	3ARR3-B4C4	67	19006
3ARR3-A3AA1	67	19006	3ARR3-B10AS3	69	**19008	3ARR3-B4D2	67	19006
3ARR3-A3AB3	68	19007	3ARR3-B10A3	64	19003	3ARR3-B4D3	67	19006
3ARR3-A3AC2	68	19007	3ARR3-B10B4	64	19003	3ARR3-B4D4	67	19006
3ARR3-A3A3	64	19003	3ARR3-B10S3	69	**19008	3ARR3-B4D6	67	19006
3ARR3-A3A4	64	19003	3ARR3-B10T3	69	**19008	3ARR3-B4F1	68	19007
3ARR3-A3B2	64	19003	3ARR3-B10V5	66	19005	3ARR3-B4F2	68	19007
3ARR3-A3B3	64	19003	3ARR3-B2AJ3	63	19002	3ARR3-B4F3	68	19007
3ARR3-A3C2	67	19006	3ARR3-B2AK3	63	19002	3ARR3-B4F4	68	19007
3ARR3-A3C3	67	19006	3ARR3-B2J3	63	19002	3ARR3-B5AA2	70	**19009
3ARR3-A3D2	67	19006	3ARR3-B2K2	63	19002	3ARR3-B5B4	70	**19009
3ARR3-A3D3	67	19006	3ARR3-B2K4	63	19002	3ARR3-B5P4	65	19004
3ARR3-A3E2	68	19007	3ARR3-B2L4	63	19002	3ARR3-B5R4	65	19004
3ARR3-A3E3	68	19007	3ARR3-B2M3	63	19002	3ARR3-B5V2	66	19005
3ARR3-A3P2	65	19004	3ARR3-B2M4	63	19002	3ARR3-B5V3	66	19005
3ARR3-A3P3	65	19004	3ARR3-B2M6	63	19002	3ARR3-B6AA3	67	19006
3ARR3-A3R2	65	19004	3ARR3-B2N3	63	19002	3ARR3-B6AW3	66	19005
3ARR3-A3R3	65	19004	3ARR3-B2P3	63	19002	3ARR3-B6A2	64	19003
3ARR3-A3S2	69	**19008	3ARR3-B2S3	69	**19008	3ARR3-B6A4	64	19003
3ARR3-A3S3	69	**19008	3ARR3-B3AB3	68	19007	3ARR3-B6A5	64	19003
3ARR3-A3T3	69	**19008	3ARR3-B3AP3	65	19004	3ARR3-B6B2	64	19003
3ARR3-A3U3	67	19006	3ARR3-B3A2	64	19003	3ARR3-B6B3	64	19003



# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>GENERAL ELECTRIC (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>		
3ARR3-B6B4	64	19003	3ARR3-CT10V5		16089	3ARR3-CT7J5	63	19002
3ARR3-B6C3	67	19006	3ARR3-CT23AA5		16097	3ARR3-CT7M5		16093
3ARR3-B6C5	67	19006		70	**19009		63	19002
3ARR3-B6D3	67	19006	3ARR3-CT24E5		16085	3ARR3-CT7N5	63	19002
3ARR3-B6D4	67	19006		64	19003	3ARR3-CT8L5		16031
3ARR3-B6F3	68	19007	3ARR3-CT24S5		16091	3ARR3-CU10T5	69	**19008
3ARR3-B6F4	68	19007		71	**19010	3ARR3-CU4A2	64	19003
3ARR3-B6TV3	71	**19010	3ARR3-CT24E5	68	19007	3ARR3-CU6B2	64	19003
3ARR3-B6TV4		16102	3ARR3-CT25A5	71	**19010	3ARR3-CU6U2	66	19005
3ARR3-B6U3	66	19005	3ARR3-CT25AC5		16094	3ARR3-CV10AC4	68	19007
3ARR3-B6U5	66	19005		68	19007	3ARR3-CV10AS4	69	**19008
3ARR3-B6V2	66	19005	3ARR3-CT25S3	66	19005	3ARR3-CV25S4	65	19004
3ARR3-B6V3	66	19005	3ARR3-CT25S6	66	19005	3ARR3-CV3D4	67	19006
3ARR3-B6V5	66	19005	3ARR3-CT27A3		16114	3ARR3-CV3P4	65	19004
3ARR3-B6W3	66	19005	3ARR3-CT27B3		16115	3ARR3-CV6V3	66	19005
3ARR3-B7BB7	63	19002	3ARR3-CT3AP4	65	19004	3ARR3-C2AN3	63	19002
3ARR3-B7J3	63	19002	3ARR3-CT3C5		16103	3ARR3-C2L5	63	19002
3ARR3-B7J4	63	19002		67	19006	3ARR3-C2N3	63	19002
3ARR3-B7K1	63	19002	3ARR3-CT3E5		16087	3ARR3-C3B3	64	19003
3ARR3-B7K3	63	19002		68	19007	3ARR3-C3C3	67	19006
3ARR3-B7K4	63	19002	3ARR3-CT3P3	65	19004	3ARR3-C5D2	70	**19009
3ARR3-B7L4	63	19002	3ARR3-CT3P6	65	19004	3ARR3-C5D3	70	**19009
3ARR3-B7M1	63	19002	3ARR3-CT3R5	65	19004	3ARR3-C5R3	65	19004
3ARR3-B7M2	63	19002	3ARR3-CT3S3	69	**19008	3ARR3-C6F2	68	19007
3ARR3-B7M3	63	19002	3ARR3-CT3S4	69	**19008	3ARR3-C7J2	63	19002
3ARR3-B7M4	63	19002	3ARR3-CT3S5		16022	3ARR3-C7M2		16105
3ARR3-B7M5	63	19002		69	**19008		63	19002
3ARR3-B7N3	63	19002	3ARR3-CT3T5		16096	3ARR3-C7M3	63	19002
3ARR3-B8B5	64	19003		69	**19008	3ARR3-C7N2	63	19002
3ARR3-B8D5	67	19006	3ARR3-CT3U3		16117	3ARR3-C16A	64	19003
3ARR3-B8L3	63	19002	3ARR3-CT3U5	66	19005	3ARR3-C24E2		16111
3ARR3-CD3V2	65	19004	3ARR3-CT34O5	64	19003	3ARR3-C5AA2		16110
3ARR3-CE7J6	63	19002	3ARR3-CT4A5		16118	3ARR3-D10S3	69	**19008
3ARR3-CJ2L5	63	19002	3ARR3-CT4D5		16088	3ARR3-D10V3	66	19005
3ARR3-CK3AA3	67	19006		67	19006	3ARR3-D3A2	64	19003
3ARR3-CK3AA5	67	19006	3ARR3-CT4O5	67	19006	3ARR3-D3A3	64	19003
3ARR3-CK3C3	67	19006	3ARR3-CT5M5		16035	3ARR3-D3A4	64	19003
3ARR3-CK3C5	67	19006	3ARR3-CT5P5		16021	3ARR3-D3A4		19551
3ARR3-CK7L3	63	19002		64	19003	3ARR3-D3B3	64	19003
3ARR3-CK7L5	63	19002	3ARR3-CT6B3		16113	3ARR3-D3C3	67	19006
3ARR3-CS2L5	63	19002	3ARR3-CT6C5	64	19003	3ARR3-D3D3	67	19006
3ARR3-CS5B6	70	**19009	3ARR3-CT6D5		16086	3ARR3-D3E4	68	19007
3ARR3-CT10A5		16095		67	19006	3ARR3-D3R3	65	19004
	64	19003	3ARR3-CT6A5		16098	3ARR3-D3S3	69	19008
3ARR3-CT10AS4	69	**19008		64	19003	3ARR3-D3V4		19551
3ARR3-CT10AS5	63	19002	3ARR3-CT6D6	67	19006	3ARR3-D4F2	68	19007
3ARR3-CT10B5	64	19003	3ARR3-CT6TV2	71	**19010	3ARR3-D4F6	68	19007
3ARR3-CT10C5		16112	3ARR3-CT6V3	66	19005	3ARR3-D5N3	63	19002
	63	19002	3ARR3-CT6V5		16099	3ARR3-D5V4		19551
3ARR3-CT10P5	66	19005		63	19002	3ARR3-D6A3	64	19003
3ARR3-CT10S4	69	**19008	3ARR3-CT6V6	66	19005	3ARR3-D6D3	67	19006
3ARR3-CT10S5		16023	3ARR3-CT6W5		16090	3ARR3-D6F3	68	19007
	69	**19008		66	19005	3ARR3-D6TV3	71	**19010
3ARR3-CT10V2	71	**19010	3ARR3-CT64B5	65	19004	3ARR3-D6U2	66	19005
3ARR3-CT10V4	71	**19010	3ARR3-CT7AL5	63	19002	3ARR3-D6U3	66	19005

\*\* Optional Mars Relay (not in 6-Pak)

Available through your local wholesaler **9**

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>GENERAL ELECTRIC (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>		
3ARR3-D6V2	66	19005	3ARR3-H10T3	69	**19008	3ARR3-J3R3	65	19004
3ARR3-D6V3	66	19005	3ARR3-H3C3	67	19006	3ARR3-J3R6	65	19004
3ARR3-D7J4	63	19002	3ARR3-H3P2	65	19004	3ARR3-J3S3		16043
3ARR3-D7J4		19550	3ARR3-H3R3	65	19004	3ARR3-J3S4	69	**19008
3ARR3-D7M5	63	19002	3ARR3-H3S2	69	**19008	3ARR3-J3S6	69	**19008
3ARR3-D8L4	63	19002	3ARR3-H6C2	67	19006	3ARR3-J3T3		16042
3ARR3-D8N2	63	19002	3ARR3-H6U2	66	19005		69	**19008
3ARR3-D8N3	63	19002	3ARR3-H6V2	66	19005	3ARR3-J3T4	69	**19008
3ARR3-EA2J3	63	19002	3ARR3-H6W2	66	19005	3ARR3-J3U2	66	19005
3ARR3-EA22M5	63	19002	3ARR3-H6W3	66	19005	3ARR3-J3U3		16041
3ARR3-EA24C5	64	19003	3ARR3-H7C3	67	19006		66	19005
3ARR3-EA3A4	64	19003	3ARR3-H7C6	67	19006	3ARR3-J3V2	66	19005
3ARR3-EA3A4		19551	3ARR3-JD3A3	64	19003	3ARR3-J3V3	66	19005
3ARR3-EA3V4	66	19005	3ARR3-J10S2	69	**19008	3ARR3-J3V4	66	19005
3ARR3-EA3V4		19551	3ARR3-J10S3	69	**19008	3ARR3-J4A2	64	19003
3ARR3-EA3V5	66	19005	3ARR3-J10S6	69	**19008	3ARR3-J4A4		16025
3ARR3-EA5A5		19551	3ARR3-J10T2	69	**19008		64	19003
3ARR3-EA5B5		19551	3ARR3-J10T3	69	**19008	3ARR3-J4A6	64	19003
3ARR3-EA5C5		19551	3ARR3-J10V2	71	**19010	3ARR3-J4C3	67	19006
3ARR3-EA5U5		19551	3ARR3-J10V6	71	**19010	3ARR3-J4D3	67	19006
3ARR3-EA7BB5		19550	3ARR3-J2J2	63	19002	3ARR3-J4F2	68	19007
3ARR3-EA7J4		19550	3ARR3-J2K2	63	19002	3ARR3-J4F3	68	19007
3ARR3-EA7J5	63	19002	3ARR3-J2K3	63	19002	3ARR3-J5A4	70	**19009
3ARR3-EA7K5		19550	3ARR3-J2L3	63	19002	3ARR3-J5B3	70	**19009
3ARR3-EA7M5		19550	3ARR3-J2M2	63	19002	3ARR3-J5C3	70	**19009
3ARR3-EA9V5		19551	3ARR3-J2N2		16037	3ARR3-J5D3	70	**19009
3ARR3-EE10AS3	69	**19008		63	19002	3ARR3-J5P3	65	19004
3ARR3-EE10S3	69	**19008	3ARR3-J2N3	63	19002	3ARR3-J5S3	65	19004
3ARR3-EE3P1	65	19004	3ARR3-J2N6	63	19002	3ARR3-J5T4	65	19004
3ARR3-EF2L6	63	19002	3ARR3-J2P3		19551	3ARR3-J5V3		19551
3ARR3-EF2N6	63	19002	3ARR3-J2S6	69	**19008	3ARR3-J6A2	64	19003
3ARR3-EG5AR6	65	19004	3ARR3-J3A4	67	19006	3ARR3-J6A3	64	19003
3ARR3-EG5R6	65	19004	3ARR3-J3AB3	68	19007	3ARR3-J6A6	64	19003
3ARR3-EG7J6	63	19002	3ARR3-J3AP6	65	19004	3ARR3-J6B2	64	19003
3ARR3-EG7K5	63	19002	3ARR3-J3AU4	64	19003	3ARR3-J6C3	67	19006
3ARR3-EH3A5	63	19003	3ARR3-J3AV2	64	19003	3ARR3-J6D2	67	19006
3ARR3-EH5A5	63	19003	3ARR3-J3A3	64	19003	3ARR3-J6D3	67	19006
3ARR3-E7M3	63	19002	3ARR3-J3A4	64	19003	3ARR3-J6E3	68	19007
3ARR3-FB6TW4	71	**19010	3ARR3-J3B2	64	19003	3ARR3-J6F3	68	19007
3ARR3-FJ10EE3	69	**19008	3ARR3-J3B3	64	19003	3ARR3-J6TV2	71	**19010
3ARR3-FJ2EA3	63	19002	3ARR3-J3B4	64	19003	3ARR3-J6TV3	71	**19010
3ARR3-FJ3BR3	65	19004	3ARR3-J3C3	67	19006	3ARR3-J6TV4	71	**19010
3ARR3-FJ3EK3	64	19003	3ARR3-J3C4	67	19006	3ARR3-J6TV5	71	**19010
3ARR3-FJ3EL3	67	19006	3ARR3-J3C5	67	19006	3ARR3-J6TV6	71	**19010
3ARR3-FJ3EM3	67	19006	3ARR3-J3D3	67	19006	3ARR3-J6TV3	71	**19010
3ARR3-FJ3P3	65	19004	3ARR3-J3D4	67	19006	3ARR3-J6TW4	71	**19010
3ARR3-FJ4EK2	64	19003	3ARR3-J3E3	68	19007	3ARR3-J6U2	66	19005
3ARR3-FJ4EM2	67	19006	3ARR3-J3GE	68	19007	3ARR3-J6U6	66	19005
3ARR3-FJ4EN3	64	19003	3ARR3-J3G3	68	19007	3ARR3-J7BB2	63	19002
3ARR3-FJ6EH2	66	19005	3ARR3-J3L3		16036	3ARR3-J7BB6	63	19002
3ARR3-F5C3	70	**19009	3ARR3-J3N3		16037	3ARR3-J7J3	63	19002
3ARR3-G10V3	66	19005	3ARR3-J3P2	65	19004	3ARR3-J7J4	63	19002
3ARR3-G3B3	64	19003	3ARR3-J3P3		16038	3ARR3-J7K3	63	19002
3ARR3-G3P3	65	19004	3ARR3-J3P6	65	19004	3ARR3-J7L2	63	19002
3ARR3-G3V2	66	19005	3ARR3-J3R2	65	19004	3ARR3-J7L3	63	19002

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>GENERAL ELECTRIC (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>		
3ARR3-J7L4	63	19002	ARR3-K4D2	67	19006	3ARR3-N6B5	64	19003
3ARR3-J7M1		19550	3ARR3-K4D3	67	19006	3ARR3-N6C3	67	19006
3ARR3-J7M2	63	19002	3ARR3-K4D4	67	19006	3ARR3-N6TV3	71	**19010
3ARR3-J8A3		19551	3ARR3-K4D5	67	19006	3ARR3-N6TW4	71	**19010
3ARR3-J8L2	63	19002	3ARR3-K4D6	67	19006	3ARR3-P3B3	64	19003
3ARR3-J8M3	63	19002	3ARR3-K4F1	68	19007	3ARR3-P3B6	64	19003
3ARR3-J8N2	63	19002	3ARR3-K4F2	68	19007	3ARR3-R3B4	64	19003
3ARR3-J8V3		19551	3ARR3-K4F3	68	19007	3ARR3-R3D4	67	19006
3ARR3-J8V3		19551	3ARR3-K4F4	68	19007	3ARR3-R3R4	65	19004
3ARR3-J9U4		19551	3ARR3-K4F5	68	19007	3ARR3-R3S5	69	**19008
3ARR3-J9V4		19551	3ARR3-K4F6	68	19007	3ARR3-R3T4	69	**19008
3ARR3-J9U4		19551	3ARR3-K5B3	70	**19009	3ARR3-R3V4	66	19005
3ARR3-J9V4		19551	3ARR3-K5C2	70	**19009	3ARR3-S3B6	64	19003
3ARR3-K10AU4	64	19003	3ARR3-K5C3	70	**19009	3ARR3-T10AS3	69	**19008
3ARR3-K10V3	66	19005	3ARR3-K5R4	65	19004	3ARR3-T3AP3	65	19004
3ARR3-K10V5	66	19005	3ARR3-K5T3	65	19004	3ARR3-T3AT4	66	19005
3ARR3-K2M1	63	19002	3ARR3-K6AV4	64	19003	3ARR3-T3A3	64	19003
3ARR3-K2M3	63	19002	3ARR3-K6A2	64	19003	3ARR3-T3B2	64	19003
3ARR3-K2N3	63	19002	3ARR3-K6A3	64	19003	3ARR3-T3B3	64	19003
3ARR3-K2S53	69	**19008	3ARR3-K6A5	64	19003	3ARR3-T3B4	64	19003
3ARR3-K3AB3	68	19007	3ARR3-K6B3	64	19003	3ARR3-T3D2	67	19006
3ARR3-K3A3	64	19003	3ARR3-K6C3	67	19006	3ARR3-T3D3	67	19006
3ARR3-K3A5	64	19003	3ARR3-K6D2	67	19006	3ARR3-T3D4	67	19006
3ARR3-K3A6	64	19003	3ARR3-K6D3	67	19006	3ARR3-T3P2	65	19004
3ARR3-K3B2	64	19003	3ARR3-K6E4	68	19007	3ARR3-T3P3	65	19004
3ARR3-K3B3	64	19003	3ARR3-K6F2	68	19007	3ARR3-T3R2	65	19004
3ARR3-K3B5	64	19003	3ARR3-K6F3	68	19007	3ARR3-T3R3	65	19004
3ARR3-K3B6	64	19003	3ARR3-K6TV3	71	**19010	3ARR3-T3R4	65	19004
3ARR3-K3C2	67	19006	3ARR3-K6U2	66	19005	3ARR3-T3S3	69	**19008
3ARR3-K3C3	67	19006	3ARR3-K6U3	66	19005	3ARR3-T3T2	69	**19008
3ARR3-K3C5	67	19006	3ARR3-K6V2	66	19005	3ARR3-T3T3	69	**19008
3ARR3-K3D2	67	19006	3ARR3-K6V3	66	19005	3ARR3-T4A3		16026
3ARR3-K3D3	67	19006	3ARR3-K6V5	66	19005	3ARR3-T4F3	68	19007
3ARR3-K3D4	67	19006	3ARR3-K7J3	63	19002	3ARR3-T6B2	64	19003
3ARR3-K3D5	67	19006	3ARR3-K7K1	63	19002	3ARR3-T6C5	67	19006
3ARR3-K3D6	67	19006	3ARR3-K7M4	63	19002	3ARR3-T6F5	68	19007
3ARR3-K3F3	68	19007	3ARR3-K8N4	63	19002	3ARR3-T6F6	68	19007
3ARR3-K3P2	65	19004	3ARR3-K8P3	63	19002	3ARR3-T6U5	66	19005
3ARR3-K3P3	65	19004	3ARR3-L3P6	65	19004	3ARR3-T6V3	66	19005
3ARR3-K3P4	65	19004	3ARR3-L4D6	67	19006	3ARR3-T7L2	63	19002
3ARR3-K3P5	65	19004	3ARR3-L4F6	68	19007	3ARR3-U10S3	69	**19008
3ARR3-K3R3	65	19004	3ARR3-L6D6	67	19006	3ARR3-U2K2	63	19002
3ARR3-K3R4	65	19004	3ARR3-N10A6	64	19003	3ARR3-U2M2	63	19002
3ARR3-K3S2	69	**19008	3ARR3-N3AP3	65	19004	3ARR3-U3B2	64	19003
3ARR3-K3S3	69	**19008	3ARR3-N3A3	64	19003	3ARR3-U3C2	67	19006
3ARR3-K3S5	69	**19008	3ARR3-N3B3	64	19003	3ARR3-U3C3	67	19006
3ARR3-K3T3	69	**19008	3ARR3-N3C3	67	19006	3ARR3-U3D3	67	19006
3ARR3-K3T4	69	**19008	3ARR3-N3P3	65	19004	3ARR3-U3P2	65	19004
3ARR3-K3U3	66	19005	3ARR3-N3P6	65	19004	3ARR3-U3P5	65	19004
3ARR3-K3U4	66	19005	3ARR3-N3R3	65	19004	3ARR3-U3R3	65	19004
3ARR3-K3V3	66	19005	3ARR3-N3S3	69	**19008	3ARR3-U3S5	65	19004
3ARR3-K3V4	66	19005	3ARR3-N3T3	69	**19008	3ARR3-U4A2	64	19003
3ARR3-K4A4	64	19003	3ARR3-N3T6	69	**19008	3ARR3-U4D2	67	19006
3ARR3-K4A5	64	19003	3ARR3-N3V3	66	19005	3ARR3-U4D3	67	19006
3ARR3-K4C4	67	19006	3ARR3-N6B3	64	19003	3ARR3-U4F2	68	19007

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>GENERAL ELECTRIC (cont'd)</b>			<b>GENERAL ELECTRIC (cont'd)</b>			<b>GREEN COLONIAL INC.</b>		
3ARR3-U5C3	70	**19009	3ARR3-W6B3		16079	A6TV2	71	**19010
3ARR3-U6B2	64	19003	3ARR3-W6U3		16062	5-0003A	65	19004
3ARR3-U6D3	67	19006	3ARR3-W8P3		16028	5-0003AT	69	**19008
3ARR3-U6F3	68	19007	3ARR3-W9TP3		16066	<b>HEIL QUAKER</b>		
3ARR3-U6U2	66	19005	3ARR3-Y3B3	64	19003	583209	69	**19008
3ARR3-U6V2	66	19005	3ARR3-Y3C3	67	19006	77903	64	19003
3ARR3-U7J2	63	19002	3ARR3-Y3R3	65	19004	84348	67	19006
3ARR3-U7K2	63	19002	3ARR3-Z3P1	65	19004	93589	65	19004
3ARR3-U7L2	63	19002	3ARR3-Z3P4	65	19004	<b>INT'L HARVESTER CO.</b>		
3ARR3-W10AS3		16081	3ARR3-Z3R3	65	19004	420458R91	67	19006
3ARR3-W10AT3		16075	3ARR3-Z3R4	65	19004	420507R91	65	19004
3ARR3-W10AU3		16069	3ARR3-Z3U4	66	19005	420944R91	67	19006
3ARR3-W10A3		16051	3ARR3-Z4AF4	68	19007	421068R91	65	19004
3ARR3-W10S2	69	**19008	3ARR3-Z4F4	68	19007	421119R91	65	19004
3ARR3-W10S3	69	**19008	3ARR3-Z5R4	65	19004	421123R91	67	19006
3ARR3-W10S3		16067	3ARR3-Z6D4	67	19006	421124R91	67	19006
3ARR3-W10S6	69	**19008	<b>GIBSON</b>			421125R91	64	19003
3ARR3-W10T3		16073	W71305	65	19004	<b>JACUZZI BROTHERS</b>		
3ARR3-W10U3		16106	W75326	64	19003	23-1308-00	63	19002
3ARR3-W24AP3		16052	W76489	67	19006	23-1308-18	63	19002
3ARR3-W24AS3		16084	W80749	63	19002	23-1308-26		19551
3ARR3-W24B3	64	19003	W80826	69	**19008	23-1308-34	66	19005
3ARR3-W24B3	64	19003	W81189	65	19004	23-1308-42	63	19002
3ARR3-W24P3		16072	W81262	69	**19008	23-1308-59	70	**19009
3ARR3-W25AS3		16077	W81382	69	**19008	<b>JANITROL</b>		
3ARR3-W25AV3		16076	W81606	69	**19008	A91B80	66	19005
3ARR3-W25C3		16061	W83137	66	19005	B91B80	66	19005
3ARR3-W25S3		16033	W90127	69	**19008	D91B80	69	**19008
3ARR3-W26C3		16058	W91666	66	19005	E91B80	69	**19008
3ARR3-W27AA3		16040	W92284	68	19007	F91B80	64	19003
3ARR3-W27A3		16065	W92405	65	19004	91B80	64	19003
3ARR3-W3AV3		16071	W92406	67	19006	<b>KELVINATOR</b>		
3ARR3-W3A3		16063	W92407	64	19003	1084298	67	19006
3ARR3-W3B2	64	19003	W96294	64	19003	1195504	67	19006
3ARR3-W3C2	67	19006	W98332	67	19006	<b>LELAND ELECTRIC</b>		
3ARR3-W3D2	67	19006	102958	64	19003	A-11493-2	63	19002
3ARR3-W3L3		16083	104026	64	19003	A-11493-5	70	**19009
3ARR3-W3N3		16082	108592	64	19003	A-12882-2	63	19002
3ARR3-W3P3		16050	113525	66	19005	A-18131-2	63	19002
3ARR3-W3R3		16109	115174	65	19004	A-18131-3	67	19006
3ARR3-W3R6	65	19004	117533	65	19004	A-18234-4	69	**19008
3ARR3-W3S3		16032	119281	65	19004	A-18234-5	70	**19009
3ARR3-W3T3		16068	135567	69	**19008	<b>LENNOX</b>		
3ARR3-W3U3		16049	72569	64	19003	P-8-1942	64	19003
3ARR3-W3V3		16048	72740	64	19003	P-8-923	63	19002
3ARR3-W4AA3		16070	72741	64	19003	<b>MAGNA-AMERICAN</b>		
3ARR3-W4A3		16047	76797	64	19003	502084	63	19002
3ARR3-W4B3		16074	77595	64	19003	504095	63	19002
3ARR3-W4D2	67	19006	77631	67	19006	6477	63	19002
3ARR3-W4D3		16029	81189	67	19006			
3ARR3-W5R3		16060	81382	64	19003			
3ARR3-W5V3		16059	82177	67	19006			
3ARR3-W6AV3		16080	82613	64	19003			
3ARR3-W6AW3		16078						

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>MARATHON ELECTRIC</b>			<b>MILE HIGH EQUIP.</b>			<b>MUELLER CLIMATROL</b>		
E-5654-1	65	19004	9181010-01		16121	SK4247	68	19007
<b>MARS</b>			9181010-02		16022	<b>MYERS (F.E.)</b>		
42	63	19002	9181010-04		16089	13178-A		19551
43	63	19002	9181010-09		16112	13179-A		19551
44	64	19003	9181010-10		16023	13180-A		19551
45	65	19004	9181010-11		16098	17889-A		19550
46	66	19005	9181010-12		*16091	17890-A		19551
47	66	19005	9181010-13		16070	17891-A		19550
63	63	19002	9181010-16		*16117	<b>NORGE-FEDDERSFRANKLIN</b>		
64	64	19003	9181010-17		16118	16-4-130-2	66	19005
65	65	19004	9181010-18		16120	20-2307	69	**19008
66	66	19005	9181010-19		*16081	20-2358	64	19003
67	67	19006	9181010-20		16075	20-4115	66	19005
68	68	19007	<b>MIRA-COLD</b>			20-4196	66	19005
69	69	**19008	110441	65	19004	20-5547	65	19004
70	70	**19009	110448	67	19006	20-6591	65	19004
71	71	**19010	110459	64	19003	20-7482	65	19004
<b>MATHES CO.</b>			157546	65	19004	20-7483	69	**19008
46-00-509	67	19006	157548	69	**19008	<b>OLSEN (C.A.)</b>		
46-00-513	66	19005	157558	69	**19008	22-9632	66	19005
46-00-525	66	19005	157579	67	19006	22-9633	64	19003
46-00-527	66	19005	157776	69	**19008	22-9634	66	19005
46-00-575	67	19006	160001	64	19003	22-9635	64	19003
46-00-587	67	19006	160002	67	19006	22-9636	65	19004
46-00-588	65	19004	160007	69	**19008	22-9646	64	19003
46-00-589	69	**19008	160008	67	19006	4-9-57A1	68	19007
46-00-590	67	19006	160011	69	**19008	4-9-57A2	68	19007
46-00-601	64	19003	<b>MIRA-COLD (cont'd)</b>			4-9-57A3	67	19006
46-00-603	67	19006	160012	66	19005	4-9-57A4	64	19003
46-00-684	64	19003	580410	65	19004	4-9-57A5	66	19005
<b>MC GRAW-EDISON</b>			<b>MITCHEL MFG.</b>			4-9-57A6	64	19003
B119009-1	64	19003	400446	64	19003	<b>PERFECTION(DIV-HUPP)</b>		
B119009-10	63	19002	400954	67	19006	M-22005-92	67	19006
B119009-11	69	**19008	413920	65	19004	M-22005-94	64	19003
B119009-12	65	19004	414090	67	19006	M-33000-35	66	19005
B119009-13	64	19003	414121	68	19007	M-33000-7	64	19003
B119009-14	69	**19008	415630	67	19006	<b>PHILCO-FORD</b>		
B119009-15	69	**19008	522105	67	19006	5192-102	69	**19008
B119009-16	68	19007	522701	64	19003	5192-104	66	19005
B119009-17	66	19005	610279	64	19003	5192-110	69	**19008
B119009-2	65	19004	622116	65	19004	5192-114	65	19004
B119009-3	64	19003	622166	65	19004	5192-116	69	**19008
B119009-4	65	19004	622278	67	19006	5192-119	67	19006
B119009-5	66	19005	622279	68	19007	5192-134	65	19004
B119009-6	67	19006	622701	64	19003	5192-135	65	19004
B119009-8	65	19004	622889	69	**19008	5192-136	65	19004
B119009-9	65	19004	622984	65	19004	5192-138	69	**19008
<b>MIDWEST MFG.</b>			622985	67	19006	5192-139	64	19003
C-11872-1	69	**19008	625922	64	19003	5192-140	64	19003
C-11872-2	66	19005	625924	67	19006	5192-141	67	19006
C-11873-1	65	19004	627078	64	19003	5192-142	67	19006
C-11873-2	65	19004	629385	67	19006	5192-151	67	19006
			723078	64	19003			

\*\* Optional Mars Relay (not in 6-Pak)

Available through your local wholesaler

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>PHILCO-FORD (cont'd)</b>			<b>RANCO (cont'd)</b>			<b>RBM (cont'd)</b>		
5192-153	67	19006	H80-2110	69	**19008	128**2**6"F	68	19007
5192-157	66	19005	H80-2111	64	19003	128**2**6"G	68	19007
5192-158	68	19007	H80-2112	68	19007	128**2**6"U	66	19005
5192-168	68	19007	H80-2113	68	19007	128**2**6"V	66	19005
5192-176	64	19003	H80-2114	64	19003	128**2**7"A	64	19003
5192-177	64	19003	H80-2115	67	19006	128**2**7"D	67	19006
5192-19	63	19002	H80-2116	69	**19008	128**2**7"E	68	19007
5192-191	64	19003	H80-2117	66	19005	128**2**7"F	68	19007
5192-206	67	19006	H80-2118	64	19003	128**6**2"M	63	19002
55192-263	66	19005	H80-2119	63	19002	128**6**2"P	65	19004
5192-265-10	64	19003	H80-2120	67	19006	128**6**3"A	64	19003
5192-265-4	66	19005	H80-2121	68	19007	128**6**3"B	64	19003
5192-265-7	65	19004	H80-2122	69	**19008	128**6**3"C	67	19006
5192-265-8	65	19004	H80-4101	63	19002	128**6**3"D	70	**19009
5192-273-1	65	19004	H80-4102	70	**19009	128**6**3"E	68	19007
5192-273-2	65	19004	H80-4103	67	19006	128**6**3"F	68	19007
5192-33	65	19004	H80-4104	68	19007	128**6**3"G	68	19007
5192-38	70	**19009				128**6**3"P	65	19004
5192-43	65	19004	<b>RBM</b>			128**6**3"R	65	19004
5192-63	65	19004	128**1**1"M	63	19002	128**6**4"A	64	19003
5192-64	70	**19009	128**2**1"M	63	19002	128**6**4"B	64	19003
5192-74	67	19006	128**2**2"M	63	19002	128**6**4"C	67	19006
5192-75	67	19006	128**2**2"P	65	19004	128**6**4"D	67	19006
5192-85	65	19004	128**2**3"A	64	19003	128**6**4"E	68	19007
5192-88	64	19003	128**2**3"B	64	19003	128**6**4"F	68	19007
5192-93	66	19005	128**2**3"C	67	19006	128**6**4"P	65	19004
5192-94	67	19006	128**2**3"D	70	**19009	128**6**4"R	65	19004
5192-95	69	**19008	128**2**3"E	68	19007	128**6**4"S	65	19004
5192-99	69	**19008	128**2**3"F	68	19007	128**6**4"T	69	**19008
			128**2**3"G	68	19007	128**6**4"U	69	**19008
<b>QUICKFREZ</b>			128**2**3"P	65	19004	128**6**5"A	64	19003
<b>QUIET-HEET</b>			128**2**3"R	65	19004	128**6**5"B	64	19003
E10821	67	19006	128**2**4"A	64	19003	128**6**5"C	64	19003
E10822	67	19006	128**2**4"B	64	19003	128**6**5"D	67	19006
E10824	69	**19008	128**2**4"C	67	19006	128**6**5"H	68	19007
E10825	66	**19005	128**2**4"D	67	19006	128**6**5"S	69	**19008
E10831	67	19006	128**2**4"E	68	19007	128**6**5"T	69	**19008
E10832	65	19004	128**2**4"F	68	19007	128**6**5"V	66	19005
E10833	67	19006	128**2**4"P	65	19004	128**6**6"A	64	19003
E10834	64	19003	128**2**4"R	65	19004	128**6**6"B	64	19003
E10835	69	**19008	128**2**4"S	65	19004	128**6**6"C	64	19003
E12461	67	19006	128**2**4"T	69	**19008	128**6**6"D	67	19006
9701-1	65	19004	128**2**4"U	69	**19008	128**6**6"F	68	19007
9702	67	19006	128**2**5"A	64	19003	128**6**6"G	68	19007
9709	67	19006	128**2**5"B	64	19003	128**6**6"H	68	19007
			128**2**5"C	64	19003	128**6**6"U	66	19005
<b>RANCO</b>			128**2**5"D	67	19006	128**6**6"V	66	19005
H80-2101	63	19002	128**2**5"H	68	19007	128**6**6"W	66	19005
H80-2102	70	**19009	128**2**5"S	69	**19008	128**6**7"A	64	19003
H80-2103	65	19004	128**2**5"T	69	**19008	128**6**7"D	67	19006
H80-2104	64	19003	128**2**5"V	66	19005	128**6**7"F	68	19007
H80-2105	67	19006	128**2**6"A	64	19003	128182**6"F	68	19007
H80-2106	67	19006	128**2**6"B	64	19003	128186**1"M	63	19002
H80-2107	65	19004	128**2**6"C	64	19003	128186**3"D	70	**19009
H80-2108	67	19006	128**2**6"D	67	19006	128990-1073	68	19007
H80-2109	68	19007						

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>RBM (cont'd)</b>			<b>RBM (cont'd)</b>			<b>RBM (cont'd)</b>		
128990-114B	64	19003	90-70	70	**19009	91255-1222	64	19003
128990-1144B	64	19003	90-8	64	19003	91255-1223	64	19003
128990-1154B	67	19006	90-9	68	19007	91255-1224	64	19003
128990-1246B	65	19004	91255-104	67	19006	91255-1225	64	19003
128990-1344B	70	**19009	91255-1041	67	19006	91255-1226	64	19003
128990-1351K	67	19006	91255-1042	67	19006	91255-1227	64	19003
128990-1361K	68	19007	91255-1043	67	19006	91255-1230	63	19002
128990-1371K	63	19002	91255-1044	67	19006	91255-1231	63	19002
128990-1381K	70	**19009	91255-1045	67	19006	91255-1232	63	19002
128990-1421K	64	19003	91255-1060	68	19007	91255-1233	63	19002
128990-1454B	70	**19009	91255-1061	68	19007	91255-1234	63	19002
128990-1474	63	19002	91255-1062	68	19007	91255-1235	63	19002
128990-1486B	67	19006	91255-1063	68	19007	91255-1240	70	**19009
128990-1501K	68	19007	91255-1064	68	19007	91255-1241	70	**19009
128990-1521K	64	19003	91255-1065	68	19007	91255-1242	70	**19009
128990-1593K	68	19007	91255-1150	67	19006	91255-1243	70	**19009
128990-1603K	67	19006	91255-1151	67	19006	91255-1244	70	**19009
128990-1623K	65	19004	91255-1152	67	19006	91255-1245	70	**19009
128990-1693K	64	19003	91255-1153	67	19006	91255-1250	66	19005
128990-1734B	65	19004	91255-1154	67	19006	91255-1251	66	19005
90-1	63	19002	91255-1155	67	19006	91255-1252	66	19005
90-10	69	**19008	91255-1160	63	19002	91255-1253	66	19005
90-13	66	19005	91255-1161	63	19002	91255-1254	66	19005
90-14	64	19003	91255-1162	63	19002	91255-1255	66	19005
90-15	67	19006	91255-1163	63	19002	91255-1260	64	19003
90-19	67	19006	91255-1164	63	19002	91255-1261	64	19003
90-2	70	**19009	91255-1165	63	19002	91255-1262	64	19003
90-20	68	19007	91255-1166	63	19002	91255-1263	64	19003
90-21	63	19002	91255-1170	70	**19009	91255-1264	64	19003
90-22	64	19003	91255-1171	70	**19009	91255-1265	64	19003
90-23	68	19007	91255-1172	70	**19009	91255-1270	64	19003
90-24	69	**19008	91255-1173	70	**19009	91255-1271	64	19003
90-25	67	19006	91255-1174	70	**19009	91255-1272	64	19003
90-26	69	**19008	91255-1175	70	**19009	91255-1273	64	19003
90-27	66	19005	91255-1176	70	**19009	91255-1274	64	19003
90-29	64	19003	91255-1180	64	19003	91255-1275	64	19003
90-3	65	19004	91255-1181	64	19003	91255-1290	63	19002
90-30	64	19003	91255-1182	64	19003	91255-1291	63	19002
90-31	67	19006	91255-1183	64	19003	91255-1292	63	19002
90-33	68	19007	91255-1184	64	19003	91255-1293	63	19002
90-34	64	19003	91255-1185	64	19003	91255-1294	63	19002
90-35	67	19006	91255-1200	65	19004	91255-1295	63	19002
90-4	64	19003	91255-1201	65	19004	91255-1296	63	19002
90-40	65	19004	91255-1202	65	19004	91255-1300	63	19002
90-41	69	**19008	91255-1203	65	19004	91255-1301	63	19002
90-5	67	19006	91255-1204	65	19004	91255-1302	63	19002
90-6	67	19006	91255-1205	65	19004	91255-1303	63	19002
90-63	63	19002	91255-1210	67	19006	91255-1304	63	19002
90-64	64	19003	91255-1211	67	19006	91255-1305	63	19002
90-65	65	19004	91255-1212	67	19006	91255-1306	63	19002
90-66	66	19005	91255-1213	67	19006	91255-1310	69	**19008
90-67	67	19006	91255-1214	67	19006	91255-1311	69	**19008
90-68	68	19007	91255-1215	67	19006	91255-1312	69	**19008
90-69	19001	19001	91255-1220	64	19003	91255-1313	69	**19008
90-7	65	19004	91255-1221	64	19003	91255-1314	69	**19008

\*\* Optional Mars Relay (not in 6-Pak)

Available through your local wholesaler **15**

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>RBM (cont'd)</b>			<b>RBM (cont'd)</b>			<b>RBM (cont'd)</b>		
91255-1315	69	**19008	91255-1553	67	19006	91255-1608	67	19006
91255-1316	69	**19008	91255-1554	67	19006	91255-1609	67	19006
91255-1317	69	**19008	91255-1555	67	19006	91255-1610	68	19007
91255-1330	67	19006	91255-1556	67	19006	91255-1611	68	19007
91255-1331	67	19006	91255-1557	67	19006	91255-1612	68	19007
91255-1332	67	19006	91255-1558	67	19006	91255-1613	68	19007
91255-1333	67	19006	91255-1559	67	19006	91255-1614	68	19007
91255-1334	67	19006	91255-1560	65	19004	91255-1615	68	19007
91255-1335	67	19006	91255-1561	65	19004	91255-1616	68	19007
91255-1344	66	19005	91255-1562	65	19004	91255-1617	68	19007
91255-1354	69	**19008	91255-1563	65	19004	91255-1618	68	19007
91255-1362	67	19006	91255-1564	65	19004	91255-1619	68	19007
91255-1510	67	19006	91255-1565	65	19004	91255-1620	65	19004
91255-1511	67	19006	91255-1566	65	19004	91255-1621	65	19004
91255-1512	67	19006	91255-1567	65	19004	91255-1622	65	19004
91255-1513	67	19006	91255-1568	65	19004	91255-1623	65	19004
91255-1514	67	19006	91255-1569	65	19004	91255-1624	65	19004
91255-1515	67	19006	91255-1570	63	19002	91255-1625	65	19004
91255-1516	67	19006	91255-1571	63	19002	91255-1626	65	19004
91255-1517	67	19006	91255-1572	63	19002	91255-1627	65	19004
91255-1518	67	19006	91255-1573	63	19002	91255-1628	65	19004
91255-1519	67	19006	91255-1574	63	19002	91255-1629	65	19004
91255-1520	68	19007	91255-1575	63	19002	91255-1630	67	19006
91255-1521	68	19007	91255-1576	63	19002	91255-1631	67	19006
91255-1522	68	19007	91255-1577	63	19002	91255-1632	67	19006
91255-1523	68	19007	91255-1578	63	19002	91255-1633	67	19006
91255-1524	68	19007	91255-1579	63	19002	91255-1634	67	19006
91255-1525	68	19007	91255-1580	65	19004	91255-1635	67	19006
91255-1526	68	19007	91255-1581	65	19004	91255-1636	67	19006
91255-1527	68	19007	91255-1582	65	19004	91255-1637	67	19006
91255-1528	68	19007	91255-1583	65	19004	91255-1638	67	19006
91255-1529	68	19007	91255-1584	65	19004	91255-1639	67	19006
91255-1530	67	19006	91255-1585	65	19004	91255-1640	67	19006
91255-1531	67	19006	91255-1586	65	19004	91255-1641	67	19006
91255-1532	67	19006	91255-1587	65	19004	91255-1642	67	19006
91255-1533	67	19006	91255-1588	65	19004	91255-1643	67	19006
91255-1534	67	19006	91255-1589	65	19004	91255-1644	67	19006
91255-1535	67	19006	91255-1590	70	**19009	91255-1645	67	19006
91255-1536	67	19006	91255-1591	70	**19009	91255-1646	67	19006
91255-1537	67	19006	91255-1592	70	**19009	91255-1647	67	19006
91255-1538	67	19006	91255-1593	70	**19009	91255-1648	67	19006
91255-1539	67	19006	91255-1594	70	**19009	91255-1649	67	19006
91255-1540	68	19007	91255-1595	70	**19009	91255-1650	67	19006
91255-1541	68	19007	91255-1596	70	**19009	91255-1651	67	19006
91255-1542	68	19007	91255-1597	70	**19009	91255-1652	67	19006
91255-1543	68	19007	91255-1598	70	**19009	91255-1653	67	19006
91255-1544	68	19007	91255-1599	70	**19009	91255-1654	67	19006
91255-1545	68	19007	91255-1600	67	19006	91255-1655	67	19006
91255-1546	68	19007	91255-1601	67	19006	91255-1656	67	19006
91255-1547	68	19007	91255-1602	67	19006	91255-1657	67	19006
91255-1548	68	19007	91255-1603	67	19006	91255-1658	67	19006
91255-1549	68	19007	91255-1604	67	19006	91255-1659	67	19006
91255-1550	67	19006	91255-1605	67	19006	91255-1660	64	19003
91255-1551	67	19006	91255-1606	67	19006	91255-1661	64	19003
91255-1552	67	19006	91255-1607	67	19006	91255-1662	64	19003



# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>RBM (cont'd)</b>			<b>RBM (cont'd)</b>			<b>RBM (cont'd)</b>		
91255-1663	64	19003	91255-1718	68	19007	91255-1793	68	19007
91255-1664	64	19003	91255-1719	68	19007	91255-1794	68	19007
91255-1665	64	19003	91255-1720	63	19002	91255-1795	68	19007
91255-1666	64	19003	91255-1721	63	19002	91255-1796	68	19007
91255-1667	64	19003	91255-1722	63	19002	91255-1797	68	19007
91255-1668	64	19003	91255-1723	63	19002	91255-1798	68	19007
91255-1669	64	19003	91255-1724	63	19002	91255-1799	68	19007
91255-1670	68	19007	91255-1725	63	19002	91255-1800	64	19003
91255-1671	68	19007	91255-1726	63	19002	91255-1801	64	19003
91255-1672	68	19007	91255-1727	63	19002	91255-1802	64	19003
91255-1673	68	19007	91255-1728	63	19002	91255-1803	64	19003
91255-1674	68	19007	91255-1729	63	19002	91255-1804	64	19003
91255-1675	68	19007	91255-1730	68	19007	91255-1805	64	19003
91255-1676	68	19007	91255-1731	68	19007	91255-1806	64	19003
91255-1677	68	19007	91255-1732	68	19007	91255-1807	64	19003
91255-1678	68	19007	91255-1733	68	19007	91255-1808	64	19003
91255-1679	68	19007	91255-1734	68	19007	91255-1809	64	19003
91255-1680	65	19004	91255-1735	68	19007	91255-1810	68	19007
91255-1681	65	19004	91255-1736	68	19007	91255-1811	68	19007
91255-1682	65	19004	91255-1737	68	19007	91255-1812	68	19007
91255-1683	65	19004	91255-1738	68	19007	91255-1813	68	19007
91255-1684	65	19004	91255-1739	68	19007	91255-1814	68	19007
91255-1685	65	19004	91255-1740	67	19006	91255-1815	68	19007
91255-1686	65	19004	91255-1741	67	19006	91255-1816	68	19007
91255-1687	65	19004	91255-1742	67	19006	91255-1817	68	19007
91255-1688	65	19004	91255-1743	67	19006	91255-1818	68	19007
91255-1689	65	19004	91255-1744	67	19006	91255-1819	68	19007
91255-1690	64	19003	91255-1745	67	19006	91255-1820	67	19006
91255-1691	64	19003	91255-1746	67	19006	91255-1821	67	19006
91255-1692	64	19003	91255-1747	67	19006	91255-1822	67	19006
91255-1693	64	19003	91255-1748	67	19006	91255-1823	67	19006
91255-1694	64	19003	91255-1749	67	19006	91255-1824	67	19006
91255-1695	64	19003	91255-1750	63	19002	91255-1825	67	19006
91255-1696	64	19003	91255-1751	63	19002	91255-1826	67	19006
91255-1697	64	19003	91255-1752	63	19002	91255-1827	67	19006
91255-1698	64	19003	91255-1753	63	19002	91255-1828	67	19006
91255-1699	64	19003	91255-1754	63	19002	91255-1829	67	19006
91255-1700	64	19003	91255-1755	63	19002	91255-1830	64	19003
91255-1701	64	19003	91255-1756	63	19002	91255-1831	64	19003
91255-1702	64	19003	91255-1757	63	19002	91255-1832	64	19003
91255-1703	64	19003	91255-1758	63	19002	91255-1833	64	19003
91255-1704	64	19003	91255-1759	63	19002	91255-1834	64	19003
91255-1705	64	19003	91255-1760	68	19007	91255-1835	64	19003
91255-1706	64	19003	91255-1761	68	19007	91255-1836	64	19003
91255-1707	64	19003	91255-1762	68	19007	91255-1837	64	19003
91255-1708	64	19003	91255-1763	68	19007	91255-1838	64	19003
91255-1709	64	19003	91255-1764	68	19007	91255-1839	64	19003
91255-1710	68	19007	91255-1765	68	19007	91255-1860	64	19003
91255-1711	68	19007	91255-1766	68	19007	91255-1861	64	19003
91255-1712	68	19007	91255-1767	68	19007	91255-1862	64	19003
91255-1713	68	19007	91255-1768	68	19007	91255-1863	64	19003
91255-1714	68	19007	91255-1769	68	19007	91255-1864	64	19003
91255-1715	68	19007	91255-1790	68	19007	91255-1865	64	19003
91255-1716	68	19007	91255-1791	68	19007	91255-1866	64	19003
91255-1717	68	19007	91255-1792	68	19007	91255-1867	64	19003

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>RBM (cont'd)</b>			<b>RBM (cont'd)</b>			<b>RED JACKET</b>		
91255-1868	64	19003	91255-269	64	19003	71-35	66	19005
91255-1869	64	19003	91255-270	68	19007	71-39	66	19005
91255-1870	69	**19008	91255-271	67	19006	71-47	66	19005
91255-1871	69	**19008	91255-272	68	19007	71-69	63	19002
91255-1872	69	**19008	91255-274	64	19003	71-70	70	**19009
91255-1873	69	**19008	91255-275	64	19003	<b>REDA-PUMP</b>		
91255-1874	69	**19008	91255-276	67	19006	E150A	63	19002
91255-1875	69	**19008	91255-402	63	19002	138E150K	64	19003
91255-1876	69	**19008	91255-403	63	19002	<b>REGENT CONTROLS</b>		
91255-1877	69	**19008	91255-406	63	19002	PRB-1	64	19003
91255-1878	69	**19008	91255-411	65	19004	PRB-2	65	19004
91255-1879	69	**19008	91255-413	63	19002	PRB-3	64	19003
91255-1880	67	19006	91255-416	63	19002	<b>REPUBLIC AIR COND.</b>		
91255-1881	67	19006	91255-451	68	19007	46-00-513	66	19005
91255-1882	67	19006	91255-454	64	19003	46-00-525	66	19005
91255-1883	67	19006	91255-456	64	19003	46-00-601	64	19003
91255-1884	67	19006	91255-458	68	19007	446-00-603	67	19006
91255-1885	67	19006	91255-460	64	19003	<b>REVCO</b>		
91255-1886	67	19006	91255-4600	64	19003	5191-64	64	19003
91255-1887	67	19006	91255-461	70	**19009	5192-111	64	19003
91255-1888	67	19006	91255-462	70	**19009	5192-136	65	19004
91255-1889	67	19006	91255-466	64	19003	5192-142	67	19006
91255-1931	69	**19008	91255-4660	64	19003	5192-177	64	19003
91255-1932	69	**19008	91255-467	68	19007	5192-191	64	19003
91255-1933	69	**19008	91255-469	64	19003	5192-61	64	19003
91255-1934	69	**19008	91255-5510	68	19007	5192-72	67	19006
91255-1944	69	**19008	91255-5511	68	19007	5192-73	68	19007
91255-1965	68	19007	91255-5512	68	19007	5192-78	65	19004
91255-200	63	19002	91255-5513	68	19007	5192-85	65	19004
91255-202	63	19002	91255-5514	68	19007	5192-99	69	**19008
91255-205	63	19002	91255-5515	68	19007	<b>RHEEM</b>		
91255-206	65	19004	91255-8002	67	19006	RES-499	64	19003
91255-208	65	19004	91255-8006	67	19006	RES-501	67	19006
91255-209	65	19004	91255-8007	67	19006	RES-505	71	**19010
91255-213	63	19002	91255-8111	64	19003	RES-524	67	19006
91255-217	63	19002	91255-8162	70	**19009	RES-525	67	19006
91255-218	65	19004	91255-8182	65	19004	RES-552	65	19004
91255-219	65	19004	91255-911	65	19004	RMM-320	67	19006
91255-220	65	19004	91255-9111	65	19004	42-18282-02	71	**19010
91255-221	63	19002	91255-9116	65	19004	42-18282-07	65	19004
91255-251	64	19003	91255-9117	65	19004	42-18282-08	69	**19008
91255-253	67	19006	91255-912	68	19007	42-18282-09	65	19004
91255-254	67	19006	91255-9126	68	19007	42-18282-10	71	**19010
91255-255	68	19007	91255-9127	68	19007	42-18282-11	69	**19008
91255-256	68	19007	91255-922	63	19002	42-18282-12	64	19003
91255-257	68	19007	91255-931	70	**19009	42-18282-13	64	19003
91255-260	68	19007	91255-933	67	19006	42-18282-14	71	**19010
91255-261	68	19007	91255-935	65	19004	42-18282-15	71	**19010
91255-262	67	19006	91255-936	66	19005	42-18282-18	66	19005
91255-263	67	19006	91255-937	67	19006	42-18282-19	64	19003
91255-264	68	19007	91255-938	64	19003	42-18282-21	64	19003
91255-265	64	19003	91255-939	67	19006	42-18282-22	69	**19008
91255-266	68	19007	91255-940	64	19003			
91255-267	68	19007	91255-941	69	**19008			
91255-268	68	19007	91255-950	68	19007			

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>RHEEM (cont'd)</b>			<b>STEWART WARNER</b>			<b>TECUMSEH (cont'd)</b>		
42-18282-23	69	**19008	6A-296101	66	19005	P82969	69	**19008
42-18282-24	66	19005	<b>SURFACE COMBUSTION</b>			820ARR3A03	66	19005
42-18528-01	69	**19008	A911B80	67	19006	820ARR3A05	64	19003
42-18528-02	65	19004	82021-20	64	19003	820ARR3A19	63	19002
42-18528-03	71	**19010	83B92	67	19006	820ARR3A25	65	19004
42-18528-04	69	**19008	91B80	64	19003	820ARR3A48	68	19007
42-18528-05	64	19003	<b>SUTTON O.A.</b>			820ARR3A7	63	19002
42-18528-06	65	19004	OAS15195	68	19007	820ARR3A79	64	19003
42-18528-07	69	**19008	OAS17046	66	19005	820ARR3A82	64	19003
42-18528-08	71	**19010	OAS17407	69	**19008	820ARR3A84	66	19005
42-18528-09	66	19005	OAS17474	65	19004	820ARR3A86	66	19005
42-18528-10	64	19003	OAS17475	64	19003	82068	67	19006
42-18528-11	64	19003	OAS17902	65	19004	82135	67	19006
42-18528-12	64	19003	OAS17905	67	19006	82135-1	67	19006
42-18528-13	71	**19010	OAS17909	67	19006	82136	65	19004
42-18528-14	71	**19010	OAS17911	67	19006	82137	65	19004
42-18528-15	66	19005	OAS18993	64	19003	82137-1	65	19004
<b>SERVEL</b>			OAS18996	64	19003	82138	65	19004
1456-585	65	19004	OAS22511	69	**19008	82138-1	65	19004
1456-586	63	19002	OAS23020	66	19005	82139	63	19002
1456-587	67	19006	OAS27666	65	19004	82139-1	63	19002
1456-596	68	19007	OAS27669	67	19006	82139-2	63	19002
1456-600	67	19006	OAS27672	65	19004	82139-3	63	19002
1456-603	65	19004	OAS27675	64	19003	82139-4	63	19002
1456-606	64	19003	14790	67	19006	82140	70	**19009
1456-608	67	19006	16950	68	19007	82140-1	70	**19009
1456-620	64	19003	17902	65	19004	82140-2	70	**19009
1456-622	67	19006	17905	67	19006	82140-3	70	**19009
1456-635	63	19002	17909	67	19006	82140-4	70	**19009
1456-636	64	19003	17911	67	19006	82141	67	19006
1456-637	63	19002	18082	63	19002	82142	67	19006
1456-638	67	19006	18993	64	19003	82142-1	67	19006
1456-646	63	19002	18996	64	19003	82143	68	19007
1456-647	63	19002	22511	69	**19008	82143-1	68	19007
<b>SKIL CORP.</b>			22816	65	19004	82144	64	19003
12116	63	19002	24279	67	19006	82146	67	19006
<b>SMITH (A.O.)</b>			<b>TAIT MFG.</b>			82146-1	67	19006
606861	63	19002	A124P1	64	19003	82147	67	19006
606861-2	63	19002	A124P2	63	19002	82147-1	67	19006
<b>SOUTHWEST MFG.</b>			W-11754	64	19003	82148	63	19002
0410-111	66	19005	W1620	63	19002	82148-1	63	19002
0410-123	69	**19008	W1624	64	19003	82150	67	19006
0410-134	65	19004	<b>TECUMSEH</b>			82150-1	67	19006
0410-142	71	**19010	P82957	63	19002	82151	68	19007
0410-151	69	**19008	P82958	63	19002	82151-1	68	19007
1225-03	66	19005	P82959	63	19002	82152	64	19003
1225-11	69	**19008	P82960	66	19005	82152-1	64	19003
<b>STA-RITE</b>			P82961	63	19002	82153	64	19003
U18-325	66	19005	P82963	63	19002	82153-1	64	19003
U18-665	64	19003	P82964	64	19003	82155	67	19006
U18-810	65	19004	P82965	65	19004	82155-1	67	19006
U18-811		19551	P82966	66	19005	82158	67	19006
						82158-1	67	19006
						82159	64	19003
						82159-1	64	19003

\*\* Optional Mars Relay (not in 6-Pak)

Available through your local wholesaler **19**

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>TECUMSEH (cont'd)</b>			<b>TECUMSEH (cont'd)</b>			<b>TECUMSEH (cont'd)</b>		
82160	64	19003	82263	68	19007	82523-3	64	19003
82160-1	63	19002	82268	64	19003	82524	63	19002
82161-1	64	19003	82269	66	19005	82525	70	**19009
82163	70	**19009	82269-1	71	**19010	82527	65	19004
82163-1	70	**19009	82271	64	19003	82527-3	65	19004
82165	65	19004	82272	64	19003	82528-3	64	19003
82167	67	19006	82273	66	19005	82529-3	64	19003
82168	67	19006	82276	63	19002	82530	67	19006
82170	67	19006	82289	67	19006	82530-3	67	19006
82171	64	19003	82291	67	19006	82531	67	19006
82173	67	19006	82296	66	19005	82531-3	67	19006
82177	67	19006	82296-1	71	**19010	82532	67	19006
82198	70	**19009	82297	64	19003	82532-3	67	19006
82204	63	19002	82298	66	19005	82537	63	19002
82209	69	**19008	82299	64	19003	82538	63	19002
82211	67	19006	82430	68	19007	82539	63	19002
82212	66	19005	82434	67	19006	82539-3	63	19002
82213	69	**19008	82435	64	19003	82540	63	19002
82214	66	19005	82439	67	19006	82540-3	63	19002
82215	63	19002	82457	65	19004	82541	63	19002
82216	67	19006	82464	65	19004	82541-3	63	19002
82217	69	**19008	82465	69	**19008	82542	69	**19008
82218	64	19003	82467	69	**19008	82542-3	69	**19008
82219	66	19005	82496	63	19002	82548	66	19005
82219-1	71	**19010	82496-1	63	19002	82549	67	19006
82221	66	19005	82501	65	19004	82549-3	67	19006
82223	66	19005	82503	65	19004	82550	67	19006
82224	66	19005	82504	68	19007	82550-3	67	19006
82225	69	**19008	82504-3	68	19007	82552	67	19006
82226	63	19002	82505	63	19002	82552-3	67	19006
82227	70	**19009	82505-1	63	19002	82553	64	19003
82228	66	19005	82507	67	19006	82553-3	64	19003
82229	63	19002	82507-3	67	19006	82556	66	19005
82230	68	19007	82508	70	**19009	82556-3	66	19005
82231	64	19003	82508-1	70	**19009	82557	66	19005
82232	67	19006	82508-2	70	**19009	82557-3	66	19005
82233	67	19006	82508-3	70	**19009	82558	66	19005
82234	64	19003	82509	65	19004	82558-3	66	19005
82235	68	19007	82509-3	65	19004	82559	69	**19008
82236	69	**19008	82510	65	19004	82561	67	19006
82237	69	**19008	82510-3	65	19004	82562	67	19006
82238	68	19007	82513	67	19006	82563	70	**19009
82239	65	19004	82513-3	67	19006	82564	70	**19009
82240	65	19004	82514	67	19006	82565	69	**19008
82242	64	19003	82514-3	67	19006	82567	68	19007
82243	64	19003	82515	68	19007	82568	69	**19008
82244	68	19007	82515-3	68	19007	82569	66	19005
82245	67	19006	82516	64	19003	82570	69	**19008
82250	64	19003	82516-3	64	19003	82571	66	19005
82251	67	19006	82517	64	19003	82572	63	19002
82256	65	19004	82520	63	19002	82573	68	19007
82257	68	19007	82521	64	19003	82574	63	19002
82260	68	19007	82521-3	64	19003	82575	64	19003
82261	66	19005	82522	67	19006	82576	64	19003
82262	65	19004	82523	64	19003	82577	68	19007

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>TECUMSEH (cont'd)</b>			<b>TECUMSEH (cont'd)</b>			<b>WESTINGHOUSE</b>		
82578	69	**19008	82827	67	19006	A56752	64	19003
82579	69	**19008				C-295754	66	19005
82580	68	19007	<b>TRANE</b>			C-295755	69	**19008
82581	65	19004	10121110/283	66	19005	C-295756	67	19006
82583	67	19006	10121111/296	64	19003	C-295758	65	19004
82584	64	19003	13150009	64	19003	C-295759	65	19004
82585	64	19003	13150011	66	19005	C295757	69	**19008
82586	64	19003	13150035	64	19003	Y13461	67	19006
82587	65	19004	13150149	65	19004	Y13462	65	19004
82588	65	19004				Y13463	67	19006
82589	68	19007	<b>WATER FURNACE</b>			Y13464	64	19003
82590	67	19006	113P517-01		16113	Y13465	64	19003
82591	64	19003	13P517-02		16115	Y13468	68	19007
82593	69	**19008	13P517-03		16114	Y16100	65	19004
82594	65	19004				Y16103	67	19006
82595	68	19007	<b>WATSCO</b>			Y16146	67	19006
82596	68	19007	WPR-63	63	19002	Y16281	67	19006
82597	66	19005	WPR-64	64	19003	Y16436	64	19003
82598	65	19004	WPR-65	65	19004	Y16552	66	19005
82599	68	19007	WPR-66	66	19005	Y36208	67	19006
82759	66	19005	WPR-67	67	19006	Y41171	65	19004
82760	63	19002	WPR-68	68	19007	Y41172	69	**19008
82760-1	63	19002	WPR-69	70	**19009	Y41173	69	**19008
82762	64	19003	WPR-70	71	**19010	Y41174	68	19007
82763	63	19002				Y41175	64	19003
82765	64	19003	<b>WELBILT</b>			Y41176	64	19003
82768	67	19006	A115	65	19004	Y41177	69	**19008
82777	63	19002	A116	67	19006	Y41178	65	19004
82778	65	19004	A117	67	19006	Y41179	66	19005
82779	69	**19008	A1348-1	65	19004	Y41180	68	19007
82780	66	19005	A1348-2	66	19005	Y41181	64	19003
82781	66	19005	A238	64	19003	Y41183	66	19005
82782	64	19003	A443	65	19004	Y41184	66	19005
82783	64	19003	A444	65	19004	Y41185	65	19004
82784	67	19006	A5238	69	**19008	Y41186	67	19006
82785	67	19006	A538	69	**19008	Y41189	64	19003
82786	67	19006	A572-1	69	**19008	Y41190	64	19003
82787	68	19007	A572-2	66	19005	Y42001	64	19003
82801	66	19005	A572-3	64	19003	Y42002	67	19006
82802	64	19003	A572-5	67	19006	Y42031	68	19007
82803	66	19005	A572-6	64	19003	Y42033	69	**19008
82804	66	19005	A572-7	64	19003	Y42034	67	19006
82806	64	19003	A572-8	65	19004	Y42227	65	19004
82808	64	19003	A6047-2	69	**19008	Y49359	65	19004
82809	63	19002	A812-1	65	19004	Y49554	64	19003
82811	69	**19008	A812-10	66	19005	Y49570	67	19006
82814	64	19003	A812-12	64	19003	Y49737	69	**19008
82815	67	19006	A812-15	65	19004	Y49862	69	**19006
82816	64	19003	A812-16	67	19006	Y6157	68	19007
82817	66	19005	A812-4	67	19006	153A085-1	67	19006
82818	64	19003	A812-5	64	19003	153A085-2	64	19003
82819	66	19005	A812-8	64	19003	153A094H01	64	19003
82820	67	19006	RWA560	68	19007	248B172-1	64	19003
82825	64	19003	WA557	65	19004	248B172-11	64	19003
82826	66	19005	WA559	67	19006	248B172-2	68	19007
			WA560	68	19007			

# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>WESTINGHOUSE</b>			<b>WHIRLPOOL (cont'd)</b>			<b>WHITE RODGERS (cont'd)</b>		
(cont'd)			563478	66	19005	128306-1663WK		16090
248B172-3	67	19006	791107	65	19004	128462-2845NN		16053
248B172-4	64	19003	791108	67	19006	128462-2845PN		16054
248B172-5	67	19006	791109	67	19006	128462-2845SN		16055
248B172-6	66	19005	791110	68	19007	128462-2845UN		16056
248B172-7	68	19007	791111	64	19003	128462-2855RN		16057
248B172-8	67	19006	791230	67	19006	128462-2865BN		16064
350A201-10	64	19003	791281	67	19006	128462-2875AN		16092
350A201-12	64	19003	792100	69	**19008	128466-2835PN		16028
350A201-13	66	19005	792110	66	19005	128466-2835RN		16060
350A201-14	69	**19008	792111	69	**19008	128466-2835VN		16059
350A201-2	68	19007	792542	67	19006	128466-2845AN		16063
350A201-3	68	19007	793087	65	19004	128466-2845LN		16083
350A201-4	64	19003	797914	66	19005	128466-2845NN		16082
350A201-5	68	19007	861673	66	19005	128466-2845PN		16050
350A201-6	64	19003	861678	64	19003	128466-2845VN		16066
350A201-7	68	19007	861683	69	**19008	128466-2845TN		16068
350A201-8	64	19003	861684	65	19004	128466-2845UN		16049
51D8072-1	64	19003				128466-2845VN		16048
51D8072-2	68	19007	<b>WHITE RODGERS</b>			128466-28455N		16032
51D8072-3	68	19007	F128146-1633AK		16097	128466-2855AN		16051
				70	**19009	128466-2855BN		16030
			F128306-1653CK		16094	128466-2855PN		16072
<b>WHIRLPOOL</b>				68	19007	128466-2855SN		16067
265292	64	19003	128146-1613JK	63	19002	128466-2855TN		16073
42789	65	19004	128146-1613MK	63	19002	128466-2865BN		16079
42790	67	19006				128466-2865CN		16058
42792	69	**19008	128146-1633EK	68	19007	128466-2865SN		16033
42793	66	19005				128466-2865UN		16062
42794	65	19004	128146-1643SK	65	19004	128466-2875AN		16047
43716	65	19004				128466-2875AN		16065
45476	68	19007	128146-1653AK	64	19003	128466-2875BN		16074
456-752	64	19003				128466-2875CN		16061
465290	65	19004	128146-1653CK	67	19006	128466-2875DN		16029
465292	64	19003	128306-1633PK	65	19004	50-128466-2845VN		16071
466176	69	**19008	128306-1643BK	64	19003	50-128466-2853SN		16081
466332	67	19006	128306-1643EK	65	19004	50-128466-2855PN		16052
466998	64	19003	128306-1643PK	65	19004	50-128466-2855SN		16084
468575	67	19006	128306-1643TK	69	**19008	50-128466-2855TN		16075
47249	64	19003				50-128466-2855UN		16069
47250	67	19006	128306-1643UK	64	19003	50-128466-2865SN		16077
47251	67	19006	128306-1653BK	67	19006	50-128466-2865VN		16076
47252	67	19006				50-128466-2865WN		16078
47253	65	19004	128306-1653DK	67	19006	50-128466-2875AN		16070
47254	68	19007				68-0281-00	64	19003
47255	69	**19008	128306-1653SK	69	**19008	68-0295-00	67	19006
47256	67	19006						
47258	65	19004	128306-1653VK	66	19005			
47259	69	**19008				<b>WORTHINGTON</b>		
47260	66	19005	128306-1663AK	64	19003	RYL-060	68	19007
479278	65	19004				RYL-061	67	19006
479370	66	19005	128306-1663CK	67	19006	RYL-07	68	19007
485006	67	19006	128306-1663DK	67	19006	RYL-08	64	19003
485102	64	19003				RYL-264	68	19007
485202	69	**19008	128306-1663VK	71	**19010	RYL-265	64	19003
560765	63	19002						



# MARS RELAY CROSS REFERENCE GUIDE

MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.	MFG. Part No.	MARS Relay No.	MARS Part No.
<b>WORTHINGTON (cont'd)</b>			<b>YORK (cont'd)</b>			<b>YORK (cont'd)</b>		
RYL-266	64	19003	24-7215P	67	19006	7185-6	68	19007
RYL-269	68	19007	24-7228P	65	19004	7185-7	64	19003
RYL-270	64	19003	24-7229P	70	**19009	7185-8	65	19004
RYL-271	67	19006	24-7230P	63	19002			
			24-7272P	70	**19009			
<b>YORK</b>			24-7273P	63	19002			
20-3258	64	19003	24-7280P	68	19007			
20-4195	68	19007	24-7281P	64	19003			
20-4196	66	19005	24-7283P	67	19006			
20-5547	65	19004	24-7319P	67	19006			
24-10537	66	19005	24-7343P	68	19007			
24-10538	66	19005	24-7388P	65	19004			
24-10589	66	19005	24-7453P	65	19004			
24-10908	64	19003	24-7461P	67	19006			
24-10912	66	19005	24-7512P	68	19007			
24-11020	66	19005	24-7514P	67	19006			
24-11099	64	19003	24-7519P	64	19003			
24-11467	64	19003	24-7526P	68	19007			
24-11567	68	19007	24-7544P	68	19007			
24-11600	64	19003	24-7556P	67	19006			
24-11606	69	**19008	24-7566P	64	19003			
24-11607	66	19005	24-7690P	67	19006			
24-11608	69	**19008	24-7931P	63	19002			
24-11609	66	19005	24-7985P	67	19006			
24-11613	69	**19008	24-8113P	68	19007			
24-11614	66	19005	24-8149P	63	19002			
24-11615	68	19007	24-8151P	65	19004			
24-11616	64	19003	24-8152P	67	19006			
24-11617	66	19005	24-8153	67	19006			
24-11618	67	19006	24-8155P	67	19006			
24-11628	64	19003	24-8156P	64	19003			
24-11637	65	19004	24-8302P	64	19003			
24-11657	69	**19008	24-8326P	68	19007			
24-11849	66	19005	24-8336P	65	19004			
24-12662	65	19004	24-8373P	68	19007			
24-12663	66	19005	24-8466P	69	**19008			
24-12696	65	19004	24-8476P	65	19004			
24-12894	70	**19009	24-8537P	69	**19008			
24-12895	63	19002	24-8662P	64	19003			
24-12898	63	19002	24-8698P	64	19003			
24-12899	70	**19009	24-8733P	64	19003			
24-12900	67	19006	24-8832P	67	19006			
24-12937	69	**19008	24-8887P	67	19006			
24-12983	69	**19008	24-8910	67	19006			
24-13210	67	19006	24-9830	67	19006			
24-13211	65	19004	24-9869	64	19003			
24-13261	65	19004	7185-1	65	19004			
24-13517	69	**19008	7185-12	67	19006			
24-13773	63	19002	7185-13	64	19003			
24-14297	65	19004	7185-14	64	19003			
24-14298	66	19005	7185-15	64	19003			
24-5339	63	19002	7185-2	63	19002			
24-5474	63	19002	7185-3	67	19006			
24-6455	65	19004	7185-4	64	19003			
24-7213P	65	19004	7185-5	64	19003			



## POTENTIAL RELAY CALIBRATION SPECIFICATIONS

MARS Part No.	MARS Relay No.	Continuous Coil Voltage	Pick-Up		Drop-Out Max.
			Min.	Max.	
19002	63	170	139	153	55
19003	64	395	260	275	120
19004	65	332	168	182	90
19005	66	395	215	225	125
19006	67	420	295	315	120
19007	68	502	325	345	135
19008	69	336	180	195	105
19009	70	253	285	305	77
19010	71	420	212	232	121

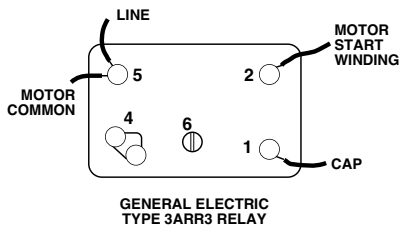

**MARS relays are available from your local wholesaler.  
Order by MARS part number.**

DISTRIBUTED BY: